Turn to the experts

Multi Split Systems

SUPREME FLEXIBILITY AND COMFORT

Delivering
The ultimate comfort
with the maximum flexibility

Carrier Multisplit system is the environmentally-friendly solution, providing simple and effective multi-room comfort for all types of home, all year round. With just one outdoor unit, this system is not only easy to conceal, it also significantly reduces noise levels for a quieter environment.

Carrier's Indoor units are a perfect fusion of esthetics and technology. With their discreet look, their flowing lines, simple curves and backlit finishing, they are truly a high-tech decorative ornament. Their harmonious design and highly compact sizes blend perfectly into any home decor.

INSTALLATION FLEXIBILITY

One outdoor unit can serve up to 5 indoor units with a wide range of compatible units: Hi-wall, Cassettes, Consoles and Ducted.

- Horizontal piping length from 25m to 35m for one unit and from 40m to 80m for all rooms
- Vertical piping length up to 10m between indoor units and up to 15m between indoor

Max. height difference of 15m can be supported to ensure that Carrier outdoor units are ideally matched with every architectural style.

EUROVENT CERTIFICATION

Eurovent Certification certifies the performance ratings of the air-condition unit according to European and international standards.

SELF-DIAGNOSIS & AUTO-PROTECTION

The unit will detect abnormal operation or malfunctions and will shut down automatically to prevent any further issues. At the same time, it will indicate an error code for faster service.

TIMER

Allows you to start the unit at a preset time in the desired cooling or heating mode.

HIGHER PIPE LIMITS

OUTDOOR UNITS	MAX. HEIGHT	
	BETWEEN INDOOR AND OUTDOOR	BETWEEN INDOOR AND INDOOR
1 drive 2	15	10
1 drive 3	15	10
1 drive 4	15	10
1 drive 5	15	10

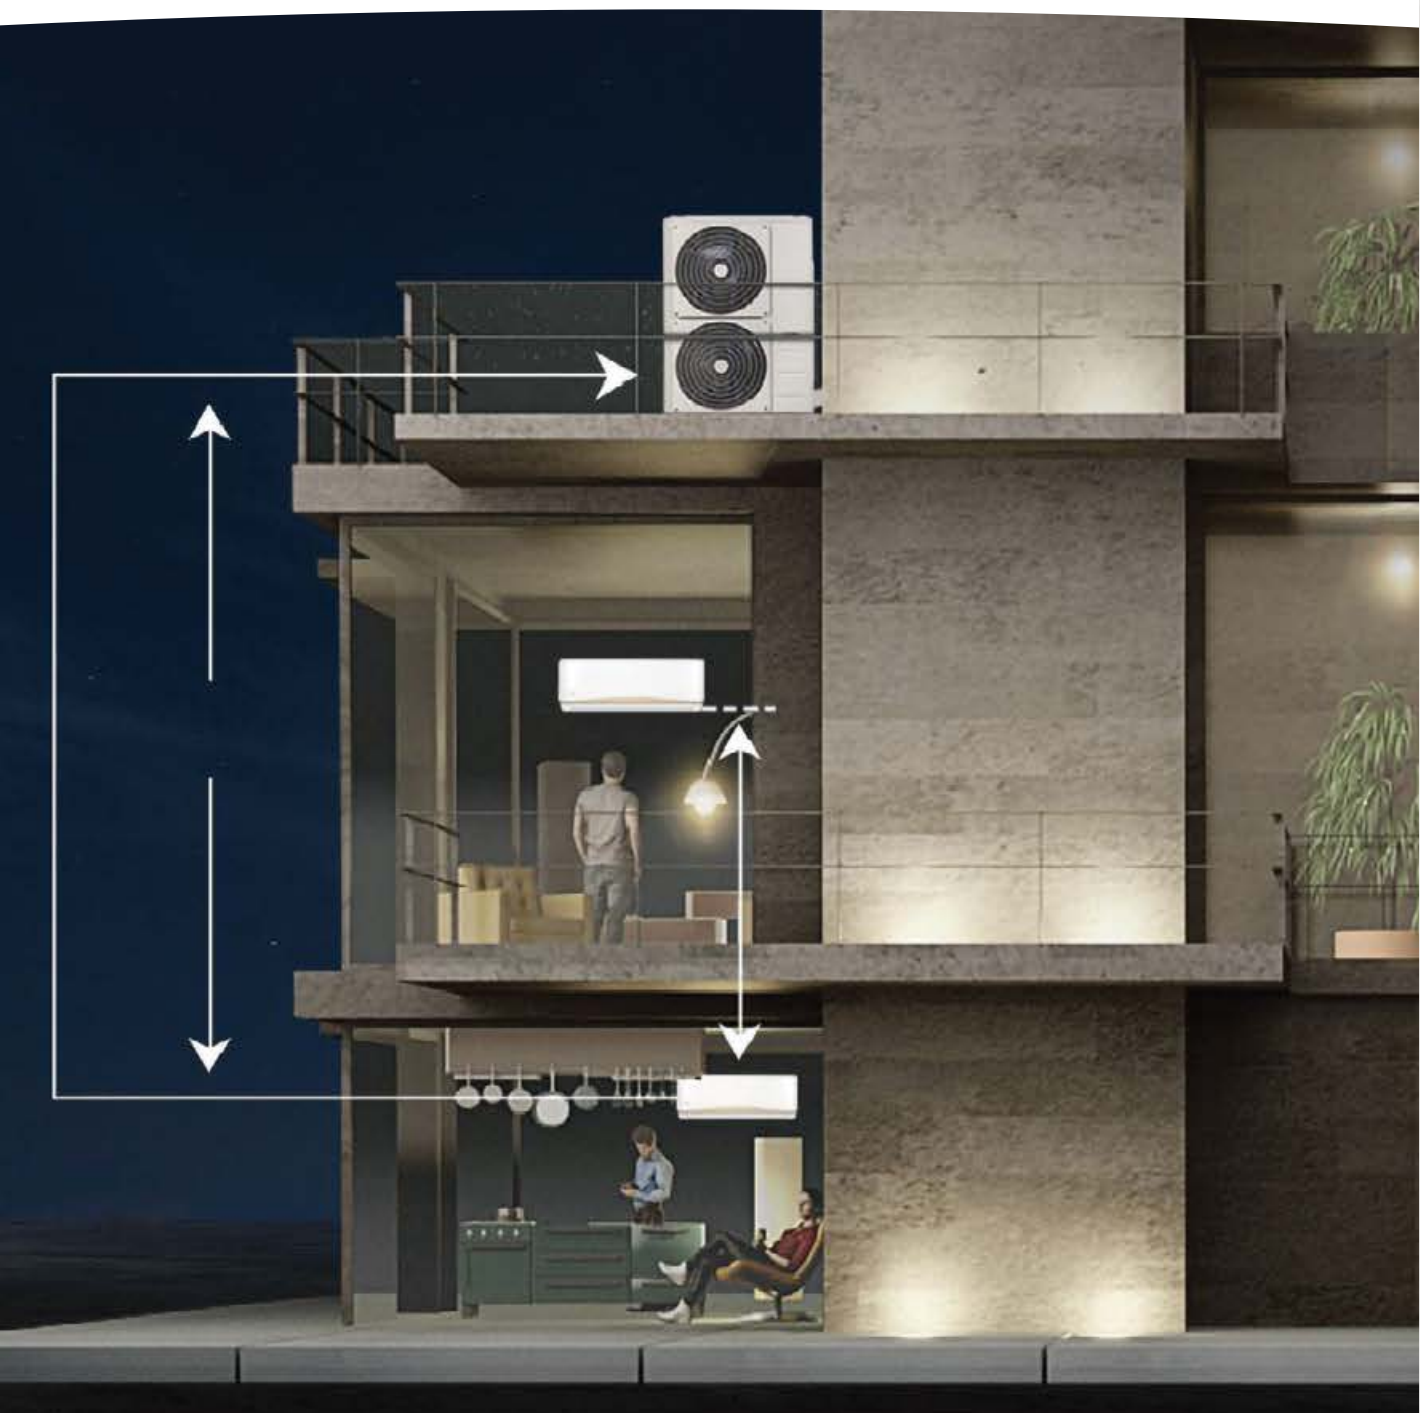

HIGHER EFFICIENCY UNDER PARTIAL LOAD

The inverter compressor offers better efficiency under partial output. When not all the rooms require air conditioning, the multi-split outdoor unit will run with partial output and lower the power consumption, while for single split solution, each of the outdoor unit is still operating 100 % output with lower efficiency.

ENERGY EFFICIENCY

Efficient under Partial Load Energy Saver

COMFORT

Quiet Mode

FLEXIBILITY

Independent Control
Wide Combination
Space Saver
Free Match
Flexible Installation
Easy Maintenance

ENERGY SAVER

Compared with fixed-speed air conditioners, full DC inverter air conditioners can reduce approximately 55 % of power consumption in a year.

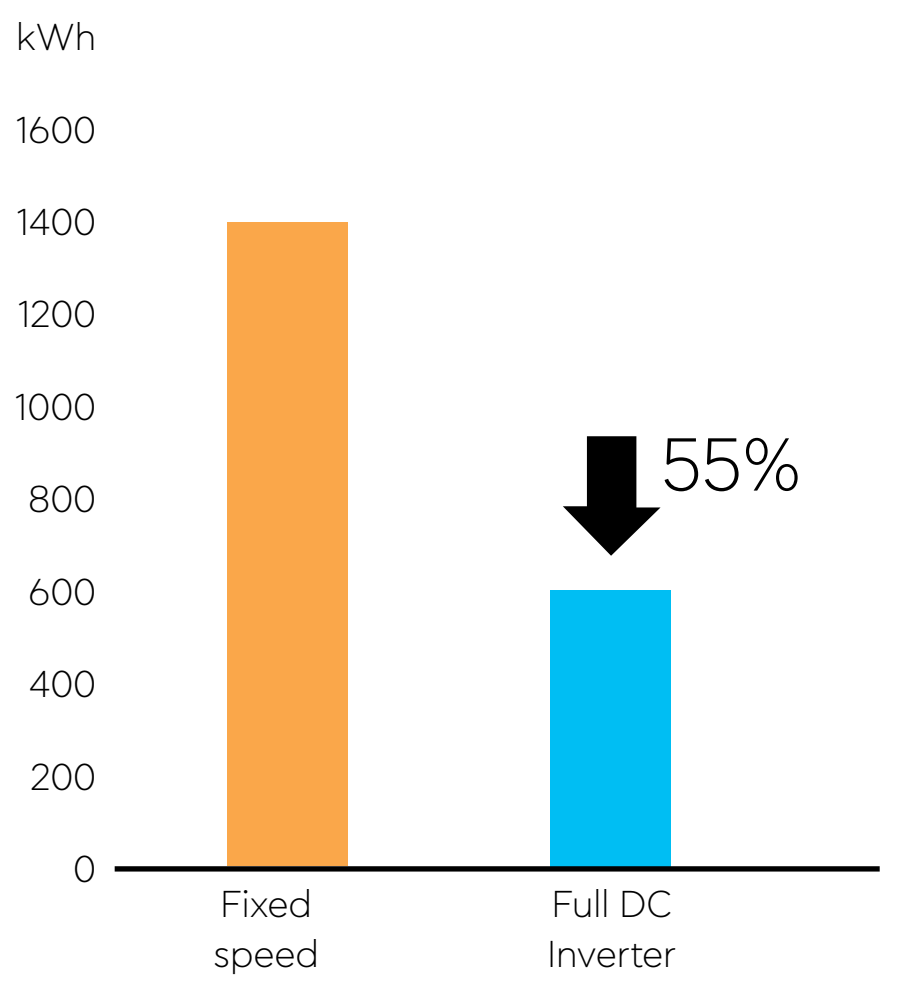

FREE MATCH

Depending on your individual rooms, a wide range of indoor units are compatible with Carrier Outdoor units.

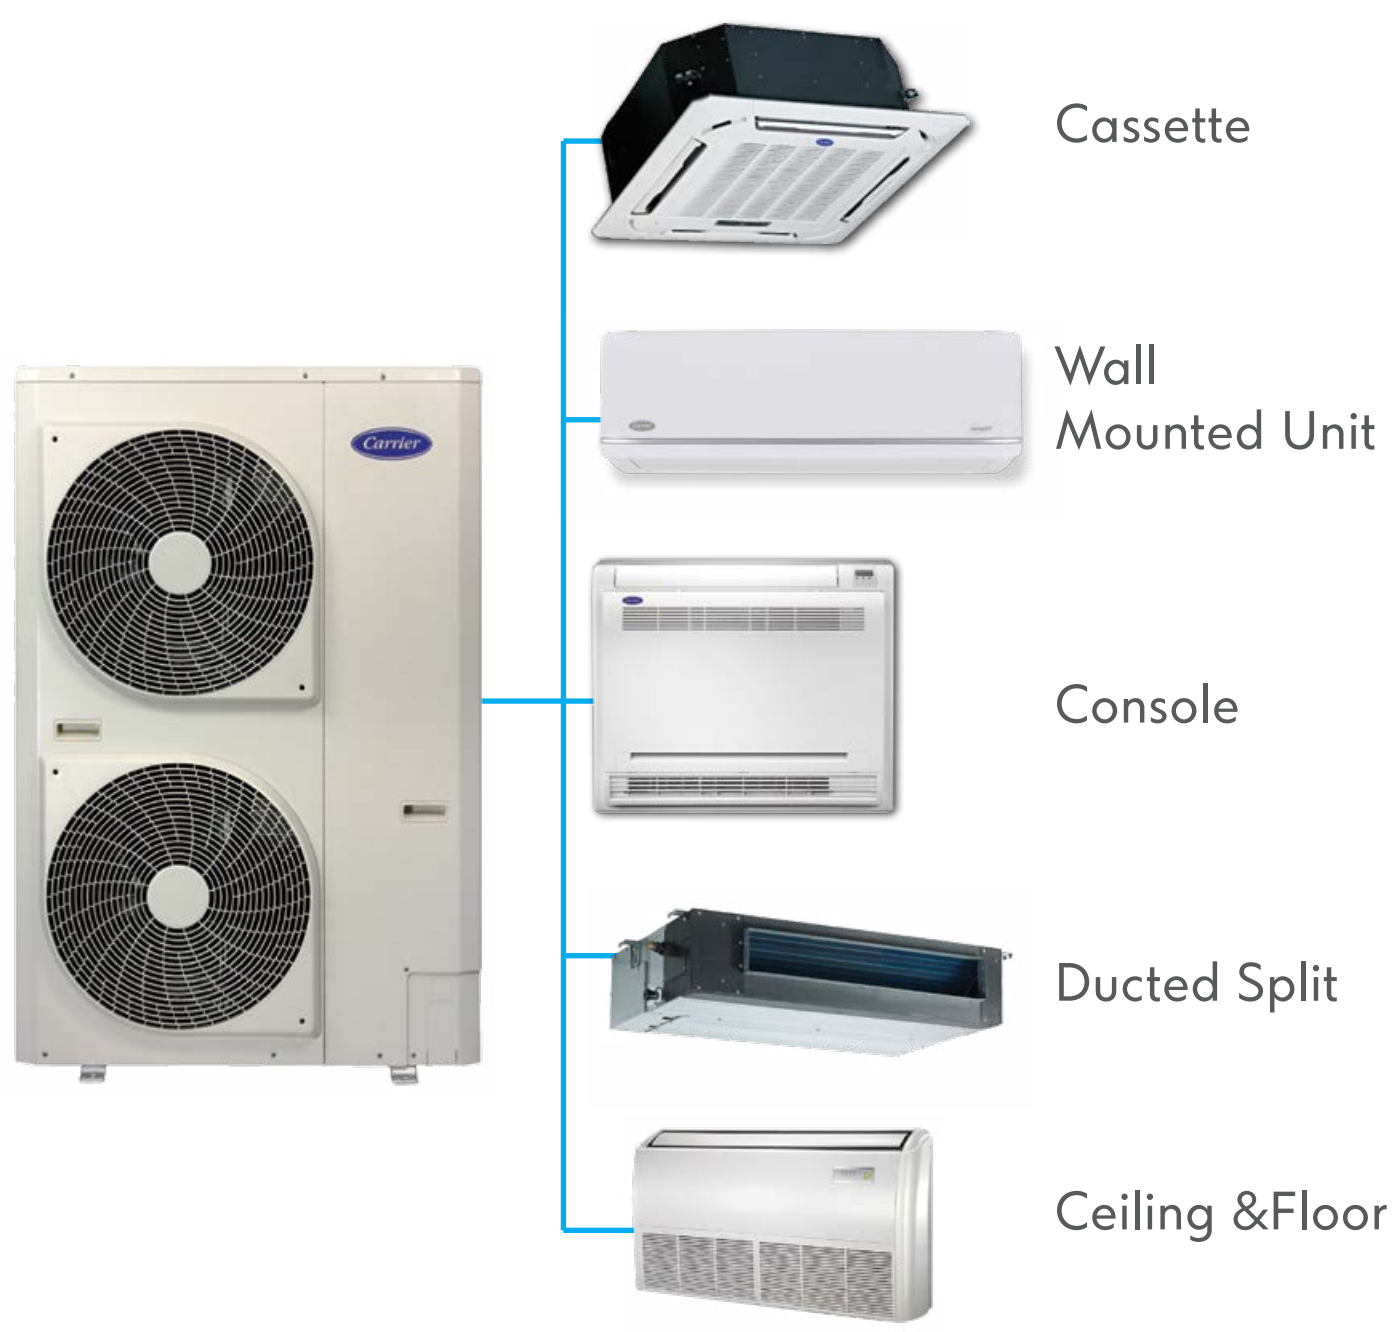

OUTDOOR UNITS TECHNICAL CHARACTERISTICS

OUTDOOR MODEL		38QUS014D8S2			
IDUS COMBINATION FOR RATING		HIWALL (NEW) 42QHG007D8S* (x2)	HIWALL 42QHB007D8S-1 (x2)	CASSETTE 42QTD007D8S (x2)	DUCTED 42QSS007D8S (x2)
Cooling capacity	kW	4.10 (1.44-4.79)	4.10 (1.44-4.79)	4.10 (1.31-4.40)	4.10 (1.39-4.84)
Heating capacity	kW	4.40 (1.50-4.91)	4.40 (1.50-4.91)	4.40 (1.47-4.98)	4.40 (1.66-4.98)
SEER/ SCOP(average)	W/W	6.8/4.0	6.8 / 4.0	6.1 / 3.8	6.1 / 3.8
Energy label		A++/A+	A++ / A+	A++ / A	A++ / A
Yearly energy consumption	kWh	211/1365	211 / 1295	236 / 1437	236 / 1437
EER/ COP	W/W	3.23/3.71	3.23 / 3.67	3.20 / 3.79	3.28 / 4.00
Standard current (cooling)	A	5,9	5,8	5,8	5,7
Standard input (cooling)	W	1270	1270	1280	1250
Standard current (heating)	A	5,3	5,4	5,2	5,0
Standard input (heating)	W	1185	1200	1160	1100
Rated current	A	11,5			
Rated input	W	2650,0			
Outdoor air flow	m³/h	2200,0			
Outdoor sound pressure level	dB(A)	56,0			
Outdoor sound power level	dB(A)	65,0			
Dimension (W×D×H)	mm	800×333×554			
Weight	kg	32.0			
Refrigerant charge amount, R32	kg	1,1			
Refrigerant piping (Liquid side/ Gas side)		2 × 1/4" - 3/8"			
Chargeless pipe length	m	7.5*2			
Additional charge	g/m	12,0			
Max. length for all rooms	m	40,0			
Max. length for one indoor unit	m	25,0			
Max. height difference between IDU and CDU	m	15,0			
Max. height difference between indoor units	m	10,0			
Temp range cooling	°C	-15 - 50			
Temp range heating	°C	-15 - 24			
Power supply	V-Hz-Ph	220-240V~, 50Hz, 1Ph			

** Preliminary Data*

OUTDOOR MODEL		38QUS018D8S2-1			
IDUS COMBINATION FOR RATING		HIWALL (NEW) 42QHG009D8S* (x2)	HIWALL 42QHB009D8S-1 (x2)	CASSETTE 42QTD009D8S (x2)	DUCTED 42QSS009D8S (x2)
Cooling capacity	kW	5.28 (2.26-5.63)	5.28 (2.23-5.57)	5.28 (2.23-5.72)	5.28 (1.32-5.57)
Heating capacity	kW	5.57 (2.37-5.68)	5.57 (2.34-5.63)	5.57 (2.34-5.86)	5.57 (1.88-5.74)
SEER/ SCOP(average)	W/W	6.1/4.0	6.1 / 4.0	6.1 / 4.0	6.1 / 3.8
Energy label		A++/A+	A++ / A+	A++ / A+	A++ / A
Yearly energy consumption	kWh	303/1585	303 / 1505	303 / 1505	303 / 1695
EER/ COP	W/W	3.24/3.71	3.10 / 3.71	3.24 / 3.71	3.24 / 4.10
Standard current (cooling)	A	7,7	7,3	7,3	7,3
Standard input (cooling)	W	1630	1705	1630	1630
Standard current (heating)	A	6,8	6,7	6,7	6,1
Standard input (heating)	W	1500	1500	1500	1360
Rated current	A	13,0			
Rated input	W	2850			
Outdoor air flow	m³/h	2200			
Outdoor sound pressure level	dB(A)	56			
Outdoor sound power level	dB(A)	65			
Dimension (W×D×H)	mm	800×333×554			
Weight	kg	35.5			
Refrigerant charge amount, R32	kg	1,25			
Refrigerant piping (Liquid side/ Gas side)		2 × 1/4" - 3/8"			
Chargeless pipe length	m	7.5*2			
Additional charge	g/m	12			
Max. length for all rooms	m	40			
Max. length for one indoor unit	m	25			
Max. height difference between IDU and CDU	m	15			
Max. height difference between indoor units	m	10			
Temp range cooling	°C	-15 - 50			
Temp range heating	°C	-15 - 24			
Power supply	V-Hz-Ph	220-240V~, 50Hz, 1Ph			

** Preliminary Data*

OUTDOOR UNITS TECHNICAL CHARACTERISTICS

OUTDOOR MODEL		38QUS021D8S3			
IDUS COMBINATION FOR RATING		HIWALL (NEW) 42QHG007D8S* (×3)	HIWALL 42QHB007D8S-1 (×3)	CASSETTE 42QTD007D8S (×3)	DUCTED 42QSS007D8S (×3)
Cooling capacity	kW	6.15 (1.95-6.74)	6.10 (1.95-6.83)	6.10 (1.99-7.02)	6.10 (2.14-7.03)
Heating capacity	kW	6.59 (1.45-6.74)	6.59 (1.45-6.86)	6.59 (1.45-6.74)	6.59 (1.81-6.74)
SEER/ SCOP(average)	W/W	6.5/4.0	6.5 / 4.0	6.1 / 4.0	6.1 / 3.8
Energy label		A++/A+	A++ / A+	A++ / A+	A++ / A
Yearly energy consumption	kWh	331/1890	329 / 1890	350 / 1785	350 / 1879
EER/ COP	W/W	3.23/3.73	3.21 / 3.72	3.47 / 3.70	3.94 / 3.99
Standard current (cooling)	A	9,0	8,6	8,0	7,0
Standard input (cooling)	W	1900	1900	1760	1550
Standard current (heating)	A	8,5	8,1	8,1	7,5
Standard input (heating)	W	1770	1770	1780	1650
Rated current	A	15,5			
Rated input	W	3300			
Outdoor air flow	m^3/h	2700			
Outdoor sound pressure level	dB(A)	58			
Outdoor sound power level	dB(A)	66			
Dimension (W×D×H)	mm	845×363×702			
Weight	kg	47.0			
Refrigerant charge amount, R32	kg	1,40			
Refrigerant piping (Liquid side/ Gas side)		3 × 1/4" - 3/8"			
Chargeless pipe length	m	7.5*3			
Additional charge	g/m	12			
Max. length for all rooms	m	60			
Max. length for one indoor unit	m	25			
Max. height difference between IDU and CDU	m	15			
Max. height difference between indoor units	m	10			
Temp range cooling	°C	-15 - 50			
Temp range heating	°C	-15 - 24			
Power supply	V-Hz-Ph	220-240V-, 50Hz, 1Ph			

** Preliminary Data*

OUTDOOR MODEL		38QUS027D8S3-1			
IDUS COMBINATION FOR RATING		HIWALL (NEW) 42QHG009D8S* (×3)	HIWALL 42QHB009D8S-1 (×3)	CASSETTE 42QTD009D8S (×3)	DUCTED 42QSS009D8S (×3)
Cooling capacity	kW	7.90 (2.20-8.50)	7.90 (2.89-8.50)	7.90 (2.10-8.50)	7.90 (2.90-8.21)
Heating capacity	kW	8.20 (1.90-8.50)	8.20 (1.99-8.50)	7.91 (1.96-8.79)	8.20 (1.99-8.35)
SEER/ SCOP(average)	W/W	6.1/4.0	6.1 / 4.0	6.1 / 4.0	6.1 / 4.0
Energy label		A++/A+	A++ / A+	A++ / A+	A++ / A+
Yearly energy consumption	kWh	454/1995	454 / 1995	454 / 1855	454 / 1995
EER/ COP	W/W	3.23/3.73	3.22 / 3.73	3.22 / 3.73	3.22 / 4.00
Standard current (cooling)	A	12,0	11,0	11,0	11,0
Standard input (cooling)	W	2450	2450	2450	2450
Standard current (heating)	A	11,0	9,9	9,5	9,2
Standard input (heating)	W	2200	2200	2120	2050
Rated current	A	17,5			
Rated input	W	3600,0			
Outdoor air flow	m^3/h	2700,0			
Outdoor sound pressure level	dB(A)	60,0			
Outdoor sound power level	dB(A)	68,0			
Dimension (W×D×H)	mm	845×363×702			
Weight	kg	51.0			
Refrigerant charge amount, R32	kg	1,7			
Refrigerant piping (Liquid side/ Gas side)		3 × 1/4" - 3/8"			
Chargeless pipe length	m	7.5*3			
Additional charge	g/m	12,0			
Max. length for all rooms	m	60,0			
Max. length for one indoor unit	m	30,0			
Max. height difference between IDU and CDU	m	15,0			
Max. height difference between indoor units	m	10,0			
Temp range cooling	°C	-15 - 50			
Temp range heating	°C	-15 - 24			
Power supply	V-Hz-Ph	220-240V-, 50Hz, 1Ph			

** Preliminary Data*

OUTDOOR UNITS TECHNICAL CHARACTERISTICS

OUTDOOR MODEL		38QUS028D8S4			
IDUS COMBINATION FOR RATING		HIWALL (NEW) 42QHG007D8S* (×4)	HIWALL 42QHB007D8S-1 (×4)	CASSETTE 42QTD007D8S (×4)	DUCTED 42QSS007D8S (×4)
Cooling capacity	kW	8.20 (2.49-10.26)	8.20 (2.51-10.43)	8.20 (2.45-10.20)	8.20 (2.85-9.67)
Heating capacity	kW	8.79 (1.61-10.14)	8.79 (1.61-10.14)	8.79 (1.54-11.43)	8.79 (2.28-11.43)
SEER/ SCOP(average)	W/W	7.0/4.0	7.0 / 4.0	6.8 / 4.0	6.1 / 3.8
Energy label		A++/A+	A++ / A+	A++ / A+	A++ / A
Yearly energy consumption	kWh	410/2380	410 / 2275	422 / 2240	471 / 2248
EER/ COP	W/W	3.23/3.71	3.23 / 3.66	3.49 / 3.69	3.49 / 3.69
Standard current (cooling)	A	10,9	11,4	10,5	10,5
Standard input (cooling)	W	2500	2540	2350	2350
Standard current (heating)	A	10,4	10,8	10,7	10,7
Standard input (heating)	W	2400	2400	2380	2380
Rated current	A	19,0			
Rated input	W	4150,0			
Outdoor air flow	m³/h	3800,0			
Outdoor sound pressure level	dB(A)	63,0			
Outdoor sound power level	dB(A)	70,0			
Dimension (W×D×H)	mm	946×410×810			
Weight	mm	1090×500×885			
Refrigerant charge amount, R32	kg	62.0			
Refrigerant piping (Liquid side/ Gas side)	kg	2,1			
Chargeless pipe length		3 × 1/4" - 3/8" + 1 × 1/4" - 1/2"			
Additional charge	m	7.5*4			
Max. length for all rooms	g/m	12,0			
Max. length for one indoor unit	m	80,0			
Max. height difference between IDU and CDU	m	30,0			
Max. height difference between indoor units	m	15,0			
Temp range cooling	m	10,0			
Temp range heating	°C	-15 - 50			
Temp range heating	°C	-15 - 24			
	V-Hz-Ph	220-240V-, 50HZ, 1PH			

** Preliminary Data*

OUTDOOR MODEL		38QUS036D8S4			
IDUS COMBINATION FOR RATING		HIWALL (NEW) 42QHG009D8S* (×4)	HIWALL 42QHB009D8S-1 (×4)	CASSETTE 42QTD009D8S (×4)	DUCTED 42QSS009D8S (×4)
Cooling capacity	kW	10.55 (2.74-11.29)	10.20 (2.05-10.55)	10.10 (2.05-10.55)	10.10 (2.73-10.70)
Heating capacity	kW	10.55 (3.60-10.83)	11.00 (2.34-11.14)	10.70 (2.34-11.14)	10.70 (3.66-11.43)
SEER/ SCOP(average)	W/W	6.5/4.0	6.5 / 3.8	5.7 / 3.8	6.0 / 3.8
Energy label		A++/A+	A++ / A	A+ / A	A+ / A
Yearly energy consumption	kWh	568/3220	550 / 3242	620 / 2984	589 / 2984
EER/ COP	W/W	3.23/3.71	2.82 / 3.55	2.74 / 3.31	2.81 / 3.46
Standard current (cooling)	A	15,0	16,0	16,2	15,9
Standard input (cooling)	W	3270	3620	3680	3600
Standard current (heating)	A	13,5	13,7	14,4	13,9
Standard input (heating)	W	2845	3100	3230	3090
Rated current	A	21,5			
Rated input	W	4600,0			
Outdoor air flow	m³/h	4000,0			
Outdoor sound pressure level	dB(A)	64,0			
Outdoor sound power level	dB(A)	72,0			
Dimension (W×D×H)	mm	946×410×810			
Weight	kg	69.0			
Refrigerant charge amount, R32	kg	2,1			
Refrigerant piping (Liquid side/ Gas side)		3 × 1/4" - 3/8" + 1 × 1/4" - 1/2"			
Chargeless pipe length	m	7.5*4			
Additional charge	g/m	12,0			
Max. length for all rooms	m	80,0			
Max. length for one indoor unit	m	35,0			
Max. height difference between IDU and CDU	m	15,0			
Max. height difference between indoor units	m	10,0			
Temp range cooling	°C	-15 - 50			
Temp range heating	°C	-15 - 24			
Power supply	V-Hz-Ph	220-240V-, 50Hz, 1Ph			

** Preliminary Data*

OUTDOOR UNITS TECHNICAL CHARACTERISTICS

OUTDOOR MODEL		38QUS042D8S5			
IDUS COMBINATION FOR RATING		HIWALL (NEW) 42QHG009D8S* (×5)	HIWALL 42QHB009D8S-1 (×5)	CASSETTE 42QTD009D8S (×5)	DUCTED 42QSS009D8S (×5)
Cooling capacity	kW	12.30 (2.70-12.31)	12.00 (2.05-12.31)	12.00 (2.05-12.31)	12.00 (2.64-12.46)
Heating capacity	kW	12.30 (3.52-12.31)	12.00 (2.34-12.31)	11.70 (2.34-12.31)	11.80 (3.52-12.60)
SEER/ SCOP(average)	W/W	6.5/3.8	6.8 / 3.8	5.7 / 3.8	5.80 / 3.80
Energy label		A++/A	A++ / A	A+ / A	A+ / A
Yearly energy consumption	kWh	662/3500	618 / 3390	737 / 3389	724 / 3353
EER/ COP	W/W	3.24/3.73	3.08 / 3.66	2.96 / 3.62	3.08 / 3.76
Standard current (cooling)	A	17,3	17,2	18,0	17,3
Standard input (cooling)	W	3800	3890	4060	3890
Standard current (heating)	A	15,00	14,6	14,3	14,0
Standard input (heating)	W	3300	3280	3230	3140
Rated current	A	22,0			
Rated input	W	4700,0			
Outdoor air flow	m³/h	3850,0			
Outdoor sound pressure level	dB(A)	64,0			
Outdoor sound power level	dB(A)	72,0			
Dimension (W×D×H)	mm	946×410×810			
Weight	kg	73.5			
Refrigerant charge amount, R32	kg	2,4			
Refrigerant piping (Liquid side/ Gas side)		4 × 1/4" - 3/8" + 1 × 1/4" - 1/2"			
Chargeless pipe length	m	7.5*5			
Additional charge	g/m	12,0			
Max. length for all rooms	m	80,0			
Max. length for one indoor unit	m	35,0			
Max. height difference between IDU and CDU	m	15,0			
Max. height difference between indoor units	m	10,0			
Temp range cooling	°C	-15 - 50			
Temp range heating	°C	-15 - 24			
Power supply	V-Hz-Ph	220-240V~, 50Hz, 1Ph			

** Preliminary Data*

Turn to the experts

HI-WALL

INDOOR UNIT - HIGH WALL 15C HP		42QHG007D8S* (NEW)	42QHG009D8S* (NEW)	42QHG012D8S* (NEW)	42QHG018D8S* (NEW)	42QHG024D8S* (NEW)
Cooling Capacity	kW	2,05	2,64	3,52	5,28	7,04
Heating Capacity	kW	2,05	2,64	3,52	5,28	7,04
Indoor fan motor input	W	22	22	20	36	60
Indoor fan motor max current	A	0,5	0,5	0,5	0,5	0,7
Sound power level	dB(A)	56	56	56	58	63
Sound pressure level (Min. - Max.)	dB(A)	20-37	20-37	20-37	21-41	22-47
Air flow(Min. - Max.)	m^3/h	180-460	180-460	195-530	300-800	480-1090
Weight	kg	8.0	8.0	8.7	11.2	13.6
Dimensions (W×D×H)	mm	726×210×291	726×210×291	835×208×295	969×241×320	1083×244×336
Refrigerant piping (Liquid side/Gas side)		1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"
Power supply	V-ph-Hz	220-240V~, 50Hz, 1Ph	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz

INDOOR UNIT - HIGH WALL AB HP		42QHB07D8S	42QHB09D8S	42QHB12D8S	42QHB18D8S	42QHB24D8S
Cooling Capacity	kW	2,05	2,64	3,52	5,28	7,04
Heating Capacity	kW	2,05	2,64	3,52	5,28	7,04
Indoor fan motor input	W	22	22	22	36	60
Indoor fan motor max current	A	0,5	0,5	0,5	0,5	0,7
Sound power level	dB(A)	55	55	57	60	63
Sound pressure level (Min. - Max.)	dB(A)	38/31/23/20	38/31/23/20	39/32/23/21	42/33/27/21	46/40/30/26
Air flow(Min. - Max.)	m^3/h	420/310/230/150	420/310/230/150	530/470/290/170	750/510/420/330	1050/750/560/450
Weight	kg	7.3	7.3	8.2	10.8	12.9
Dimensions (W×D×H)	mm	722×187×290	722×187×290	802×189×297	965×215×319	1080×226×335
Refrigerant piping (Liquid side/Gas side)		1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"	3/8" - 5/8"
Power supply	V-ph-Hz	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz

H/M/L/SL: High / Medium / Low / Super Low
WxDxH: Width x Depth x Height

** Preliminary Data*

CONSOLE / UNDER CEILING

INDOOR UNIT - CONSOLE		42QZA012D8S	42QZL018D8S-1
Cooling Capacity	kW	3,52	5,28
Heating Capacity	kW	3,52	5,28
Indoor fan motor input	W	67	96
Indoor fan motor max current	A	0,60	0,94
Sound power level	dB(A)	60	61
Sound pressure level (Min. - Max.)	dB(A)	43/41/35	44/42/36
Air flow(Min. - Max.)	m^3/h	530/480/360	880/760/650
Weight	kg	15.0/19.5	28.0/33.5
Dimensions (W×D×H)	mm	700X600X210	1068X675X235
Refrigerant piping (Liquid side/Gas side)		1/4"/3/8"	1/4"/1/2"
Power supply	V-ph-Hz	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz

H/M/L/SL: High / Medium / Low / Super Low
WxDxH: Width x Depth x Height

** Preliminary Data*

CASSETTE

INDOOR UNIT - CASSETTE		42QTD007D8S	42QTD009D8S	42QTD012D8S	42QTD018D8S-1
Cooling Capacity	kW	2,05	2,64	3,52	5,28
Heating Capacity	kW	2,05	2,64	3,52	5,28
Indoor fan motor input	W	45	45	45	45
Indoor fan motor max current	A	0,40	0,40	0,40	0,40
Sound power level	dB(A)	58	58	59	60
Sound pressure level (high/med/low)	dB(A)	42/39/36	42/39/36	42/39/36	45/42/36
Air flow (high/med/low)	m^3/h	560/430/390	560/430/390	560/430/390	680/550/400
Weight (Body)	kg	15.0	15.0	16.5	16.5
Weight (Panel)	kg	2.5	2.5	2.5	2.5
Dimensions (W×D×H)(Body)	mm	570X570X260	570X570X260	570X570X260	570X570X260
Dimensions (W×D×H)(Panel)	mm	647x647x50	647x647x50	647x647x50	647x647x50
Refrigerant piping (Liquid side/Gas side)		1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"
Power supply	V-ph-Hz	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz

Notes:
- *The New Model of 42QTD018D8S-1 is PCB board assembly changed*
- *D8S Model and D8S-1 Model can be connected with Current CDU, which model is 38QUS***D8S2/3/4/5*
- *Do not have 24K IDU due to communication protocol issue*

DUCTED

INDOOR UNIT - DUCTED		42QSS007D8S	42QSS009D8S	42QSS012D8S	42QSS018D8S
Cooling Capacity	kW	2,05	2,64	3,52	5,28
Heating Capacity	kW	2,05	2,64	3,52	5,28
Indoor fan motor input	W	130	130	130	90
Indoor fan motor max current	A	1,11	1,11	1,11	1,20
Sound power level	dB(A)	60	60	60	61
Sound pressure level (high/med/low)	dB(A)	42/36/30	42/36/30	42/36/30	452/38/33
Air flow (high/med/low)	m^3/h	580/480/300	580/480/300	580/480/300	880/650/350
External static pressure	Pa	0-30	0-30	0-30	0-100
Weight	kg	18.0	18.0	18.0	24.5
Dimensions (W×D×H)	mm	700X450X200	700X450X200	700X450X200	880X674X210
Refrigerant piping (Liquid side/Gas side)		1/4" - 3/8"	1/4" - 3/8"	1/4" - 3/8"	1/4" - 1/2"
Power supply	V-ph-Hz	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz	220-240V / 1Ph / 50Hz

Note:
Do not have 24K IDU due to communication protocol issue

INDOOR COMBINATION AND VARIABLE CAPACITY FOR 14K HEAT PUMP (SYSTEM 2)

COOLING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)			RATED CAPACITY (kW)(NOM. COOLING)		TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B		UNIT A	UNIT B	MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	2	2,00	—	1,23	2,00	2,90	0,30	0,62	0,77	3,23
	9	9	—	2,6	2,50	—	1,23	2,50	3,20	0,30	0,77	0,97	3,23
	12	12	—	3,2	3,50	—	1,23	3,50	3,90	0,30	1,08	1,30	3,23
	18	18	—	5,2	4,10	—	1,35	4,10	4,50	0,40	1,27	1,46	3,23
1:2	7+7	7	7	4	2,05	2,05	1,76	4,10	4,54	0,43	1,27	1,46	3,23
	7+9	7	9	4,6	1,79	2,31	1,76	4,10	4,54	0,43	1,27	1,46	3,23
	7+12	7	12	5,2	1,51	2,59	1,76	4,10	4,54	0,43	1,27	1,46	3,24
	9+9	9	9	5,2	2,05	2,05	1,76	4,10	4,54	0,43	1,27	1,46	3,24
	9+12	9	12	5.8	1,76	2,34	1,76	4,10	4,54	0,43	1,27	1,46	3,24

HEATING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)			RATED CAPACITY (kW)(NOM. COOLING)		TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B		UNIT A	UNIT B	MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	2.0	2,45	—	1,41	2,50	2,82	0,28	0,67	0,83	3,75
	9	9	—	2.6	2,92	—	1,41	2,90	3,36	0,28	0,78	0,97	3,73
	12	12	—	3.2	3,75	—	1,41	3,80	4,31	0,28	1,02	1,23	3,72
	18	18	—	5,2	4,70	—	1,55	4,70	5,20	0,38	1,27	1,32	3,71
1:2	7+7	7	7	4	2,35	2,35	2,02	4,70	5,20	0,39	1,15	1,32	4,10
	7+9	7	9	4,6	2,06	2,64	2,02	4,70	5,20	0,39	1,15	1,32	4,10
	7+12	7	12	5,2	1,75	3,00	2,02	4,75	5,26	0,39	1,19	1,32	4,00
	9+9	9	9	5,2	2,38	2,38	2,02	4,75	5,26	0,39	1,19	1,32	4,00
	9+12	9	12	5.8	2,04	2,71	2,02	4,75	5,26	0,39	1,19	1,32	4,00

INDOOR COMBINATION AND VARIABLE CAPACITY FOR 18K HEAT PUMP (SYSTEM 2)

COOLING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)		RATED CAPACITY (kW)(NOM. COOLING)		TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B	UNIT A	UNIT B	MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	2,00	—	1,40	2,00	2,90	0,35	0,62	0,77	3,24
	9	9	—	2,50	—	1,40	2,50	3,20	0,35	0,77	0,96	3,24
	12	12	—	3,50	—	1,40	3,50	3,90	0,35	1,07	1,29	3,26
	18	18	—	5,00	—	1,61	5,00	5,41	0,45	1,55	2,01	3,23
1:2	7+7	7	7	2,10	2,10	2,08	4,20	5,51	0,53	1,05	2,17	4,00
	7+9	7	9	2,06	2,64	2,08	4,70	5,72	0,53	1,24	2,17	3,80
	7+12	7	12	1,95	3,35	2,08	5,30	6,29	0,53	1,64	2,17	3,23
	9+9	9	9	2,60	2,60	2,08	5,20	6,29	0,53	1,61	2,17	3,23
	9+12	9	12	2,31	3,09	2,08	5,40	6,29	0,53	1,67	2,17	3,23
	12+12	12	12	2,70	2,70	2,08	5,40	6,29	0,53	1,67	2,17	3,23

HEATING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)		RATED CAPACITY (kW)(NOM. COOLING)		TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B	UNIT A	UNIT B	MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	2,50	—	1,54	2,50	3,03	0,32	0,67	0,84	3,73
	9	9	—	3,00	—	1,54	3,00	3,63	0,32	0,80	1,01	3,73
	12	12	—	3,80	—	1,54	3,80	4,60	0,32	1,01	1,22	3,75
	18	18	—	5,30	—	1,71	5,30	5,72	0,42	1,43	1,72	3,71
1:2	7+7	7	7	2,50	2,50	2,20	5,00	5,94	0,47	1,22	1,86	4,10
	7+9	7	9	2,32	2,98	2,20	5,30	6,05	0,47	1,29	1,86	4,10
	7+12	7	12	2,03	3,47	2,20	5,50	6,66	0,47	1,43	1,86	3,85
	9+9	9	9	2,75	2,75	2,20	5,50	6,66	0,47	1,38	1,86	4,00
	9+12	9	12	2,40	3,20	2,20	5,60	6,66	0,47	1,45	1,86	3,85
	12+12	12	12	2,80	2,80	2,20	5,60	6,66	0,47	1,45	1,86	3,85

INDOOR COMBINATION AND VARIABLE CAPACITY FOR 21K HEAT PUMP (SYSTEM 3)

COOLING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)			RATED CAPACITY (kW)(NOM. COOLING)			TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B	UNIT C	UNIT A	UNIT B	UNIT C	MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	—	2,00	—	—	1,43	2,00	2,90	0,38	0,62	0,78	3,21
	9	9	—	—	2,50	—	—	1,43	2,50	3,20	0,38	0,78	0,97	3,21
	12	12	—	—	3,50	—	—	1,43	3,50	3,90	0,38	1,09	1,31	3,21
	18	18	—	—	5,00	—	—	1,65	5,00	6,50	0,48	1,55	1,79	3,22
1:2	7+7	7	7	—	2,10	2,10	—	2,01	4,20	5,49	0,56	1,31	1,88	3,21
	7+9	7	9	—	2,06	2,64	—	2,01	4,70	5,80	0,56	1,46	1,98	3,21
	7+12	7	12	—	1,95	3,35	—	2,01	5,30	6,10	0,56	1,65	2,07	3,21
	7+18	7	18		1,76	4,54	—	2,01	6,30	6,83	0,56	1,94	2,17	3,24
	9+9	9	9	—	2,65	2,65	—	2,01	5,30	6,41	0,56	1,65	2,07	3,21
	9+12	9	12	—	2,57	3,43	—	2,01	6,00	6,59	0,56	1,85	2,11	3,24
	9+18	9	18	—	2,10	4,20	—	2,01	6,30	6,83	0,56	1,94	2,17	3,24
	12+12	12	12	—	3,10	3,10	—	2,01	6,20	6,83	0,56	1,91	2,17	3,24
1:3	7+7+7	7	7	7	2,03	2,03	2,03	2,44	6,10	7,20	0,68	1,88	2,35	3,24
	7+7+9	7	7	9	1,92	1,92	2,47	2,44	6,30	7,26	0,68	1,94	2,35	3,24
	7+7+12	7	7	12	1,70	1,70	2,91	2,44	6,30	7,32	0,68	1,94	2,35	3,24
	7+9+9	7	9	9	1,76	2,27	2,27	2,44	6,30	7,32	0,68	1,94	2,35	3,24
	9+9+9	9	9	9	2,10	2,10	2,10	2,44	6,30	7,32	0,68	1,94	2,35	3,24

HEATING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)			RATED CAPACITY (kW)(NOM. COOLING)			TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B	UNIT C	UNIT A	UNIT B	UNIT C	MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	—	2,50	—	—	1,43	2,50	3,03	0,35	0,73	0,92	3,41
	9	9	—	—	3,00	—	—	1,43	3,00	3,63	0,35	0,88	1,10	3,41
	12	12	—	—	3,80	—	—	1,43	3,80	4,60	0,35	1,11	1,34	3,41
	18	18	—	—	5,30	—	—	1,82	5,30	6,94	0,45	1,54	2,07	3,45
1:2	7+7	7	7	—	2,50	2,50	—	2,22	5,00	6,07	0,54	1,39	1,80	3,61
	7+9	7	9	—	2,45	3,15	—	2,22	5,60	6,40	0,54	1,55	1,89	3,61
	7+12	7	12	—	2,21	3,79	—	2,22	6,00	6,74	0,54	1,64	1,98	3,65
	7+18	7	18		1,79	4,61	—	2,22	6,40	7,55	0,54	1,76	2,07	3,63
	9+9	9	9	—	3,00	3,00	—	2,22	6,00	7,08	0,54	1,64	1,98	3,65
	9+12	9	12	—	2,74	3,66	—	2,22	6,40	7,28	0,54	1,75	2,01	3,65
	9+18	9	18	—	2,13	4,27	—	2,22	6,40	7,55	0,54	1,77	2,07	3,62
	12+12	12	12	—	3,20	3,20	—	2,22	6,40	7,55	0,54	1,75	2,07	3,65
1:3	7+7+7	7	7	7	2,25	2,25	2,25	2,70	6,74	7,95	0,65	1,80	2,25	3,75
	7+7+9	7	7	9	2,07	2,07	2,66	2,70	6,80	7,95	0,65	1,81	2,25	3,75
	7+7+12	7	7	12	1,86	1,86	3,18	2,70	6,90	8,09	0,65	1,84	2,25	3,75
	7+9+9	7	9	9	1,93	2,48	2,48	2,70	6,90	8,09	0,65	1,84	2,25	3,75
	9+9+9	9	9	9	2,30	2,30	2,30	2,70	6,90	8,09	0,65	1,84	2,25	3,75

INDOOR COMBINATION AND VARIABLE CAPACITY FOR 27K HEAT PUMP (SYSTEM 3)

COOLING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)			RATED CAPACITY (kW)(NOM. COOLING)			TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B	UNIT C	UNIT A	UNIT B	UNIT C	MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	—	2,00	—	—	1,58	2,00	2,90	0,40	0,62	0,78	3,21
	9	9	—	—	2,50	—	—	1,58	2,50	3,20	0,40	0,78	0,97	3,21
	12	12	—	—	3,50	—	—	1,58	3,50	3,90	0,40	1,09	1,31	3,21
	18	18	—	—	5,00	—	—	1,78	5,00	6,50	0,50	1,55	1,79	3,22
1:2	7+7	7	7	—	2,10	2,10	—	2,21	4,20	6,32	0,64	1,30	2,08	3,23
	7+9	7	9	—	2,06	2,64	—	2,21	4,70	6,72	0,64	1,46	2,20	3,23
	7+12	7	12	—	1,95	3,35	—	2,21	5,30	7,11	0,64	1,64	2,45	3,23
	7+18	7	18	—	1,82	4,68	—	2,21	6,50	7,90	0,64	2,01	2,69	3,23
	9+9	9	9	—	2,65	2,65	—	2,21	5,30	7,11	0,64	1,64	2,45	3,23
	9+12	9	12	—	2,57	3,43	—	2,21	6,00	7,51	0,64	1,86	2,57	3,23
	9+18	9	18	—	2,27	4,53	—	2,21	6,80	7,90	0,64	2,11	2,69	3,23
	12+12	12	12	—	3,15	3,15	—	2,21	6,30	7,66	0,64	1,95	2,64	3,23
	12+18	12	18	—	2,72	4,08	—	2,21	6,80	7,90	0,64	2,11	2,69	3,23
1:3	7+7+7	7	7	7	2,43	2,43	2,43	2,77	7,30	8,69	0,76	2,26	2,91	3,23
	7+7+9	7	7	9	2,25	2,25	2,90	2,77	7,40	8,69	0,76	2,29	2,91	3,23
	7+7+12	7	7	12	2,13	2,13	3,65	2,77	7,90	8,69	0,76	2,45	2,91	3,23
	7+7+18	7	7	18	1,73	1,73	4,44	2,77	7,90	8,69	0,76	2,45	2,91	3,23
	7+9+9	7	9	9	2,13	2,74	2,74	2,77	7,60	8,69	0,76	2,35	2,91	3,23
	7+9+12	7	9	12	1,98	2,54	3,39	2,77	7,90	8,69	0,76	2,45	2,91	3,23
	7+9+18	7	9	18	1,63	2,09	4,18	2,77	7,90	8,69	0,76	2,45	2,91	3,23
	7+12+12	7	12	12	1,78	3,06	3,06	2,77	7,90	8,69	0,76	2,45	2,91	3,23
	9+9+9	9	9	9	2,63	2,63	2,63	2,77	7,90	8,69	0,76	2,45	2,91	3,23
	9+9+12	9	9	12	2,37	2,37	3,16	2,77	7,90	8,69	0,76	2,45	2,91	3,23
	9+12+12	9	12	12	2,15	2,87	2,87	2,77	7,90	8,69	0,76	2,45	2,91	3,23

HEATING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)			RATED CAPACITY (kW)(NOM. COOLING)			TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B	UNIT C	UNIT A	UNIT B	UNIT C	MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	—	2,50	—	—	1,58	2,50	2,90	0,40	0,69	0,87	3,61
	9	9	—	—	3,00	—	—	1,58	3,00	3,20	0,40	0,83	1,04	3,61
	12	12	—	—	3,80	—	—	1,58	3,80	3,90	0,40	1,05	1,26	3,61
	18	18	—	—	5,60	—	—	1,82	5,60	6,95	0,50	1,55	1,78	3,61
1:2	7+7	7	7	—	2,50	2,50	—	2,21	5,00	6,32	0,55	1,38	1,81	3,62
	7+9	7	9	—	2,45	3,15	—	2,21	5,60	6,72	0,55	1,54	1,91	3,63
	7+12	7	12	—	2,21	3,79	—	2,21	6,00	7,11	0,55	1,61	2,12	3,72
	7+18	7	18	—	1,96	5,04	—	2,21	7,00	7,90	0,55	1,88	2,34	3,73
	9+9	9	9	—	3,00	3,00	—	2,21	6,00	7,11	0,55	1,61	2,12	3,72
	9+12	9	12	—	2,70	3,60	—	2,21	6,30	7,51	0,55	1,69	2,23	3,73
	9+18	9	18	—	2,33	4,67	—	2,21	7,00	7,90	0,55	1,88	2,34	3,72
	12+12	12	12	—	3,25	3,25	—	2,21	6,50	7,66	0,55	1,74	2,29	3,73
	12+18	12	18	—	2,80	4,20	—	2,21	7,00	7,90	0,55	1,88	2,34	3,72
1:3	7+7+7	7	7	7	2,27	2,27	2,27	2,77	6,80	8,69	0,66	1,82	2,53	3,73
	7+7+9	7	7	9	2,13	2,13	2,74	2,77	7,00	8,69	0,66	1,88	2,53	3,72
	7+7+12	7	7	12	2,05	2,05	3,52	2,77	7,62	8,69	0,66	2,04	2,53	3,73
	7+7+18	7	7	18	1,75	1,75	4,50	2,77	8,00	8,69	0,66	2,15	2,53	3,72
	7+9+9	7	9	9	2,13	2,74	2,74	2,77	7,62	8,69	0,66	2,04	2,53	3,73
	7+9+12	7	9	12	1,98	2,54	3,39	2,77	7,90	8,69	0,66	2,12	2,53	3,72
	7+9+18	7	9	18	1,65	2,12	4,24	2,77	8,00	8,69	0,66	2,15	2,53	3,72
	7+12+12	7	12	12	1,81	3,10	3,10	2,77	8,00	8,69	0,66	2,15	2,53	3,72
	9+9+9	9	9	9	2,63	2,63	2,63	2,77	7,90	8,69	0,66	2,12	2,53	3,72
	9+9+12	9	9	12	2,40	2,40	3,20	2,77	8,00	8,69	0,66	2,15	2,53	3,72
	9+12+12	9	12	12	2,18	2,91	2,91	2,77	8,00	8,69	0,66	2,15	2,53	3,72

INDOOR COMBINATION AND VARIABLE CAPACITY FOR 28K HEAT PUMP (SYSTEM 4)

COOLING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)				RATED CAPACITY (kW)(NOM. COOLING)				TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B	UNIT C	UNIT D	UNIT A	UNIT B	UNIT C	UNIT D	MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	—	—	2,00	—	—	—	1,52	2,00	2,90	0,40	0,62	0,78	3,21
	9	9	—	—	—	2,50	—	—	—	1,52	2,50	3,20	0,40	0,78	0,97	3,21
	12	12	—	—	—	3,50	—	—	—	1,52	3,50	3,90	0,40	1,09	1,31	3,21
	18	18	—	—	—	5,00	—	—	—	1,72	5,00	6,50	0,50	1,55	1,79	3,22
	24	24	—	—	—	7,00	—	—	—	1,89	7,00	8,20	0,65	2,17	2,28	3,22
1:2	7+7	7	7	—	—	2,10	2,10	—	—	2,05	4,20	6,08	0,62	1,31	1,98	3,21
	7+9	7	9	—	—	2,06	2,64	—	—	2,05	4,70	6,40	0,62	1,46	2,10	3,21
	7+12	7	12	—	—	1,95	3,35	—	—	2,05	5,30	6,81	0,62	1,65	2,23	3,21
	7+18	7	18	—	—	1,96	5,04	—	—	2,05	7,00	7,55	0,62	2,18	2,72	3,21
	7+24	7	24	—	—	2,03	6,97	—	—	2,05	9,00	8,78	0,62	2,80	2,94	3,21
	9+9	9	9	—	—	2,65	2,65	—	—	2,05	5,30	6,81	0,62	1,65	2,23	3,21
	9+12	9	12	—	—	2,57	3,43	—	—	2,05	6,00	6,98	0,62	1,87	2,35	3,21
	9+18	9	18	—	—	2,43	4,87	—	—	2,05	7,30	7,55	0,62	2,27	2,72	3,21
	9+24	9	24	—	—	2,70	7,20	—	—	2,05	9,90	8,37	0,62	3,08	2,97	3,21
	12+12	12	12	—	—	3,25	3,25	—	—	2,05	6,50	7,39	0,62	2,02	2,42	3,21
	12+18	12	18	—	—	2,92	4,38	—	—	2,05	7,30	7,55	0,62	2,27	2,72	3,21
	12+24	12	24	—	—	3,17	6,33	—	—	2,05	9,50	7,96	0,62	2,96	2,99	3,21
	18+18	18	18	—	—	3,75	3,75	—	—	2,05	7,50	7,55	0,62	2,34	2,72	3,21
1:3	7+7+7	7	7	7	—	2,00	2,00	2,00	—	2,63	6,00	8,46	0,74	1,85	2,87	3,25
	7+7+9	7	7	9	—	1,98	1,98	2,54	—	2,63	6,50	8,46	0,74	2,00	2,87	3,25
	7+7+12	7	7	12	—	1,91	1,91	3,28	—	2,63	7,10	8,46	0,74	2,18	2,87	3,25
	7+7+18	7	7	18	—	1,71	1,71	4,39	—	2,63	7,80	8,46	0,74	2,40	2,87	3,25
	7+9+9	7	9	9	—	1,90	2,45	2,68	—	2,63	6,80	8,46	0,74	2,09	2,87	3,25
	7+9+12	7	9	12	—	1,88	2,41	3,21	—	2,63	7,50	8,46	0,74	2,31	2,87	3,25
	7+9+18	7	9	18	—	1,61	2,06	4,13	—	2,63	7,80	8,46	0,74	2,40	2,87	3,25
	7+12+12	7	12	12	—	1,76	3,02	3,02	—	2,63	7,80	8,46	0,74	2,40	2,87	3,25
	9+9+9	9	9	9	—	2,37	2,37	2,37	—	2,63	7,10	8,46	0,74	2,18	2,87	3,25
	9+9+12	9	9	12	—	2,34	2,34	3,12	—	2,63	7,80	8,46	0,74	2,40	2,87	3,25
	9+9+18	9	9	18	—	1,95	1,95	3,90	—	2,63	7,80	8,46	0,74	2,40	2,87	3,25
	9+12+12	9	12	12	—	2,13	2,84	2,84	—	2,63	7,80	8,46	0,74	2,40	2,87	3,25
	12+12+12	12	12	12	—	2,60	2,60	2,60	—	2,63	7,80	8,46	0,74	2,40	2,87	3,25
1:4	7+7+7+7	7	7	7	7	2,05	2,05	2,05	2,05	3,04	8,21	9,93	0,84	2,47	3,09	3,32
	7+7+7+9	7	7	7	9	1,92	1,92	1,92	2,46	3,04	8,21	9,93	0,84	2,47	3,09	3,32
	7+7+7+12	7	7	7	12	1,74	1,74	1,74	2,99	3,04	8,21	9,93	0,84	2,47	3,09	3,32
	7+7+9+9	7	7	9	9	1,80	1,80	2,31	2,31	3,04	8,21	9,93	0,84	2,47	3,09	3,32
	7+7+9+12	7	7	9	12	1,64	1,64	2,11	2,81	3,04	8,21	9,93	0,84	2,49	3,09	3,30
	7+9+9+9	7	9	9	9	1,69	2,17	2,17	2,17	3,04	8,21	9,93	0,84	2,48	3,09	3,31
	9+9+9+9	9	9	9	9	2,05	2,05	2,05	2,05	3,04	8,21	9,93	0,84	2,50	3,09	3,29

HEATING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)				RATED CAPACITY (kW)(NOM. COOLING)				TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B	UNIT C	UNIT D	UNIT A	UNIT B	UNIT C	UNIT D	MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	—	—	2,50	—	—	—	1,68	2,50	2,90	0,40	0,69	0,87	3,61
	9	9	—	—	—	3,00	—	—	—	1,68	3,00	3,20	0,40	0,83	1,04	3,61
	12	12	—	—	—	3,80	—	—	—	1,68	3,80	3,90	0,40	1,05	1,26	3,61
	18	18	—	—	—	5,60	—	—	—	1,91	5,60	7,01	0,50	1,55	1,78	3,61
	24	24	—	—	—	7,60	—	—	—	1,91	7,60	8,50	0,70	2,11	2,21	3,61
1:2	7+7	7	7	—	—	2,50	2,50	—	—	2,28	5,00	6,73	0,61	1,39	1,96	3,61
	7+9	7	9	—	—	2,45	3,15	—	—	2,28	5,60	7,10	0,61	1,55	2,08	3,61
	7+12	7	12	—	—	2,21	3,79	—	—	2,28	6,00	7,55	0,61	1,66	2,20	3,61
	7+18	7	18	—	—	2,18	5,62	—	—	2,28	7,80	8,37	0,61	2,16	2,69	3,61
	7+24	7	24	—	—	2,21	7,59	—	—	2,28	9,80	9,74	0,61	2,71	2,91	3,61
	9+9	9	9	—	—	3,00	3,00	—	—	2,28	6,00	7,55	0,61	1,66	2,20	3,61
	9+12	9	12	—	—	3,00	4,00	—	—	2,28	7,00	7,74	0,61	1,94	2,32	3,61
	9+18	9	18	—	—	2,63	5,27	—	—	2,28	7,90	8,37	0,61	2,19	2,69	3,61
	9+24	9	24	—	—	2,59	6,91	—	—	2,28	9,50	9,28	0,61	2,63	2,94	3,61
	12+12	12	12	—	—	3,75	3,75	—	—	2,28	7,50	8,19	0,61	2,08	2,40	3,61
	12+18	12	18	—	—	3,20	4,80	—	—	2,28	8,00	8,37	0,61	2,22	2,69	3,61
	12+24	12	24	—	—	3,33	6,67	—	—	2,28	10,00	8,37	0,61	2,77	2,69	3,61
	18+18	18	18	—	—	4,00	4,00	—	—	2,28	8,00	8,37	0,61	2,22	2,69	3,61
1:3	7+7+7	7	7	7	—	2,33	2,33	2,33	—	2,91	7,00	9,37	0,73	1,92	2,84	3,65
	7+7+9	7	7	9	—	2,37	2,37	3,05	—	2,91	7,80	9,37	0,73	2,14	2,84	3,65
	7+7+12	7	7	12	—	2,29	2,29	3,92	—	2,91	8,50	9,37	0,73	2,28	2,84	3,73
	7+7+18	7	7	18	—	1,93	1,93	4,95	—	2,91	8,80	9,37	0,73	2,37	2,84	3,72
	7+9+9	7	9	9	—	2,38	3,06	2,68	—	2,91	8,50	9,37	0,73	2,28	2,84	3,73
	7+9+12	7	9	12	—	2,20	2,83	3,77	—	2,91	8,80	9,37	0,73	2,36	2,84	3,73
	7+9+18	7	9	18	—	1,81	2,33	4,66	—	2,91	8,80	9,37	0,73	2,37	2,84	3,72
	7+12+12	7	12	12	—	1,99	3,41	3,41	—	2,91	8,80	9,37	0,73	2,36	2,84	3,73
	9+9+9	9	9	9	—	2,93	2,93	2,93	—	2,91	8,80	9,37	0,73	2,36	2,84	3,73
	9+9+12	9	9	12	—	2,64	2,64	3,52	—	2,91	8,80	9,37	0,73	2,36	2,84	3,73
	9+9+18	9	9	18	—	2,20	2,20	4,40	—	2,91	8,80	9,37	0,73	2,37	2,84	3,72
	9+12+12	9	12	12	—	2,40	3,20	3,20	—	2,91	8,80	9,37	0,73	2,37	2,84	3,72
	12+12+12	12	12	12	—	2,93	2,93	2,93	—	2,91	8,80	9,37	0,73	2,37	2,84	3,72
1:4	7+7+7+7	7	7	7	7	2,28	2,28	2,28	2,28	3,37	9,10	11,01	0,83	2,45	3,06	3,72
	7+7+7+9	7	7	7	9	2,12	2,12	2,12	2,73	3,37	9,10	11,01	0,83	2,45	3,06	3,72
	7+7+7+12	7	7	7	12	1,93	1,93	1,93	3,31	3,37	9,10	11,01	0,83	2,45	3,06	3,72
	7+7+9+9	7	7	9	9	1,99	1,99	2,56	2,56	3,37	9,10	11,01	0,83	2,45	3,06	3,72
	7+7+9+12	7	7	9	12	1,82	1,82	2,34	3,12	3,37	9,10	11,01	0,83	2,45	3,06	3,72
	7+9+9+9	7	9	9	9	1,87	2,41	2,41	2,41	3,37	9,10	11,01	0,83	2,45	3,06	3,72
	9+9+9+9	9	9	9	9	2,28	2,28	2,28	2,28	3,37	9,10	11,01	0,83	2,45	3,06	3,72

INDOOR COMBINATION AND VARIABLE CAPACITY FOR 36K HEAT PUMP (SYSTEM 4)

COOLING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)				RATED CAPACITY (kW)(NOM. COOLING)				TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B	UNIT C	UNIT D	UNIT A	UNIT B	UNIT C	UNIT D	MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	—	—	2,00	—	—	—	1,59	2,00	2,90	0,45	0,62	0,78	3,21
	9	9	—	—	—	2,50	—	—	—	1,59	2,50	3,20	0,45	0,78	0,97	3,21
	12	12	—	—	—	3,50	—	—	—	1,59	3,50	3,90	0,45	1,09	1,31	3,21
	18	18	—	—	—	5,00	—	—	—	1,80	5,00	6,50	0,58	1,56	1,79	3,21
	24	24	—	—	—	7,00	—	—	—	2,01	7,00	8,00	0,62	2,18	2,29	3,21
1:2	7+7	7	7	—	—	2,10	2,10	—	—	2,23	4,20	6,36	0,63	1,31	2,15	3,21
	7+9	7	9	—	—	2,06	2,64	—	—	2,23	4,70	6,57	0,63	1,46	2,31	3,21
	7+12	7	12	—	—	2,03	3,47	—	—	2,23	5,50	6,89	0,63	1,71	2,48	3,21
	7+24	7	24	—	—	2,05	7,05	—	—	2,23	9,10	11,21	0,63	2,83	3,14	3,21
	7+18	7	18	—	—	1,96	5,04	—	—	2,23	7,00	8,48	0,63	2,18	2,91	3,21
	9+9	9	9	—	—	2,65	2,65	—	—	2,23	5,30	6,89	0,63	1,65	2,48	3,21
	9+12	9	12	—	—	2,57	3,43	—	—	2,23	6,00	7,42	0,63	1,87	2,64	3,21
	9+18	9	18	—	—	2,50	5,00	—	—	2,23	7,50	9,54	0,63	2,34	2,97	3,21
	9+24	9	24	—	—	2,65	7,05	—	—	2,23	9,70	11,80	0,63	3,02	3,30	3,21
	12+12	12	12	—	—	3,50	3,50	—	—	2,23	7,00	7,95	0,63	2,18	2,81	3,21
	12+18	12	18	—	—	3,40	5,10	—	—	2,23	8,50	10,07	0,63	2,65	2,97	3,21
	12+24	12	24	—	—	3,33	6,67	—	—	2,23	10,00	11,80	0,63	3,12	3,24	3,21
	18+18	18	18	—	—	5,00	5,00	—	—	2,23	10,00	10,60	0,63	3,12	3,30	3,21
1:3	7+7+7	7	7	7	—	2,00	2,00	2,00	—	2,86	6,00	7,42	0,79	1,85	2,97	3,25
	7+7+9	7	7	9	—	1,98	1,98	2,54	—	2,86	6,50	7,95	0,79	2,01	3,14	3,23
	7+7+12	7	7	12	—	2,02	2,02	3,46	—	2,86	7,50	9,01	0,79	2,33	3,30	3,22
	7+7+18	7	7	18	—	1,97	1,97	5,06	—	2,86	9,00	11,66	0,79	2,80	3,63	3,21
	7+7+24	7	7	24	—	2,03	2,03	6,95	—	2,86	11,00	13,25	0,79	3,42	3,80	3,22
	7+9+9	7	9	9	—	1,96	2,52	2,52	—	2,86	7,00	9,01	0,79	2,17	3,30	3,23
	7+9+12	7	9	12	—	2,00	2,57	3,43	—	2,86	8,00	10,07	0,79	2,48	3,47	3,22
	7+9+18	7	9	18	—	1,96	2,51	5,03	—	2,86	9,50	11,66	0,79	2,96	3,63	3,21
	7+9+24	7	9	24	—	2,01	2,59	6,90	—	2,86	11,50	13,25	0,79	3,57	3,83	3,22
	7+12+12	7	12	12	—	2,03	3,48	3,48	—	2,86	9,00	10,60	0,79	2,80	3,47	3,21
	7+12+18	7	12	18	—	1,89	3,24	4,86	—	2,86	10,00	11,66	0,79	3,12	3,63	3,21
	7+12+24	7	12	24	—	1,87	3,21	6,42	—	2,86	11,50	13,25	0,79	3,57	3,76	3,22
	7+18+18	7	18	18	—	1,63	4,19	4,19	—	2,86	10,00	11,66	0,79	3,12	3,63	3,21
	9+9+9	9	9	9	—	2,50	2,50	2,50	—	2,86	7,50	10,07	0,79	2,34	3,47	3,21
	9+9+12	9	9	12	—	2,55	2,55	3,40	—	2,86	8,50	10,60	0,79	2,65	3,47	3,21
	9+9+18	9	9	18	—	2,50	2,50	5,00	—	2,86	10,00	11,66	0,79	3,12	3,63	3,21
	9+9+24	9	9	24	—	2,46	2,46	6,57	—	2,86	11,50	11,66	0,79	3,57	3,63	3,22
	9+12+12	9	12	12	—	2,59	3,45	3,45	—	2,86	9,50	11,66	0,79	2,96	3,63	3,21
	9+12+18	9	12	18	—	2,31	3,08	4,62	—	2,86	10,00	11,66	0,79	3,12	3,63	3,21
	9+12+24	9	12	24	—	2,00	2,67	5,33	—	2,86	10,00	11,66	0,79	3,11	3,63	3,22
	9+18+18	9	18	18	—	2,00	4,00	4,00	—	2,86	10,00	11,66	0,79	3,12	3,63	3,21
	12+12+12	12	12	12	—	3,33	3,33	3,33	—	2,86	10,00	11,66	0,79	3,12	3,63	3,21
	12+12+18	12	12	18	—	2,86	2,86	4,29	—	2,86	10,00	11,66	0,79	3,12	3,63	3,21
1:4	7+7+7+7	7	7	7	7	2,05	2,05	2,05	2,05	3,71	8,20	10,60	0,89	2,30	3,30	3,56
	7+7+7+9	7	7	7	9	1,98	1,98	1,98	2,55	3,71	8,50	11,66	0,89	2,50	3,47	3,40
	7+7+7+12	7	7	7	12	2,02	2,02	2,02	3,45	3,71	9,50	12,72	0,89	2,88	3,63	3,30
	7+7+7+18	7	7	7	18	1,88	1,88	1,88	4,85	3,71	10,50	13,78	0,89	3,27	4,29	3,21
	7+7+9+9	7	7	9	9	1,97	1,97	2,53	2,53	3,71	9,00	12,72	0,89	2,73	3,63	3,30
	7+7+9+12	7	7	9	12	2,00	2,00	2,57	3,43	3,71	10,00	13,25	0,89	3,12	3,96	3,21
	7+7+9+18	7	7	9	18	1,79	1,79	2,30	4,61	3,71	10,50	13,78	0,89	3,27	4,29	3,21
	7+7+12+12	7	7	12	12	1,93	1,93	3,32	3,32	3,71	10,50	13,78	0,89	3,27	4,29	3,21
	7+9+9+9	7	9	9	9	1,96	2,51	2,51	2,51	3,71	9,50	13,25	0,89	2,94	3,80	3,23
	7+9+9+12	7	9	9	12	2,01	2,58	2,58	3,44	3,71	10,60	13,78	0,89	3,30	4,29	3,21
	7+9+9+18	7	9	9	18	1,73	2,22	2,22	4,44	3,71	10,60	13,78	0,89	3,30	4,29	3,21
	7+9+12+12	7	9	12	12	1,86	2,39	3,18	3,18	3,71	10,60	13,78	0,89	3,30	4,29	3,21
	7+12+12+12	7	12	12	12	1,73	2,96	2,96	2,96	3,71	10,60	13,78	0,89	3,30	4,29	3,21
	9+9+9+9	9	9	9	9	2,65	2,65	2,65	2,65	3,71	10,60	13,78	0,89	3,30	4,29	3,21
	9+9+9+12	9	9	9	12	2,45	2,45	2,45	3,26	3,71	10,60	13,78	0,89	3,30	4,29	3,21
	9+9+9+18	9	9	9	18	2,12	2,12	2,12	4,24	3,71	10,60	13,78	0,89	3,30	4,29	3,21
	9+9+12+12	9	9	12	12	2,27	2,27	3,03	3,03	3,71	10,60	13,78	0,89	3,30	4,29	3,21
	9+12+12+12	9	12	12	12	2,12	2,83	2,83	2,83	3,71	10,60	13,78	0,89	3,30	4,29	3,21

INDOOR COMBINATION AND VARIABLE CAPACITY FOR 36K HEAT PUMP (SYSTEM 4)

HEATING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)				RATED CAPACITY (kW)(NOM. COOLING)				TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B	UNIT C	UNIT D	UNIT A	UNIT B	UNIT C	UNIT D	MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	—	—	2,50	—	—	—	1,80	2,50	2,90	0,45	0,69	0,86	3,62
	9	9	—	—	—	3,00	—	—	—	1,80	3,00	3,20	0,45	0,83	1,04	3,62
	12	12	—	—	—	3,80	—	—	—	1,80	3,80	3,90	0,45	1,05	1,26	3,62
	18	18	—	—	—	5,60	—	—	—	2,04	5,60	7,00	0,55	1,55	1,78	3,61
	24	24	—	—	—	7,60	—	—	—	2,04	7,60	8,50	0,70	2,11	2,21	3,61
1:2	7+7	7	7	—	—	2,50	2,50	—	—	2,52	5,00	7,20	0,63	1,38	2,15	3,63
	7+9	7	9	—	—	2,45	3,15	—	—	2,52	5,60	7,44	0,63	1,54	2,31	3,63
	7+12	7	12	—	—	2,21	3,79	—	—	2,52	6,00	7,80	0,63	1,65	2,48	3,63
	7+18	7	18	—	—	2,24	5,76	—	—	2,52	8,00	9,60	0,63	2,21	2,91	3,62
	7+24	7	24	—	—	2,21	7,59	—	—	2,52	9,80	11,40	0,63	2,71	3,21	3,62
	9+9	9	9	—	—	3,00	3,00	—	—	2,52	6,00	7,80	0,63	1,65	2,48	3,63
	9+12	9	12	—	—	3,00	4,00	—	—	2,52	7,00	8,40	0,63	1,93	2,64	3,63
	9+18	9	18	—	—	2,93	5,87	—	—	2,52	8,80	10,80	0,63	2,43	2,98	3,62
	9+24	9	24	—	—	2,78	7,42	—	—	2,52	10,20	12,00	0,63	2,82	3,31	3,62
	12+12	12	12	—	—	3,75	3,75	—	—	2,52	7,50	9,00	0,63	2,07	2,81	3,62
	12+18	12	18	—	—	3,76	5,64	—	—	2,52	9,40	11,40	0,63	2,60	2,98	3,62
	12+24	12	24	—	—	3,50	7,00	—	—	2,52	10,50	12,00	0,63	2,90	3,24	3,62
	18+18	18	18	—	—	5,50	5,50	—	—	2,52	11,00	12,00	0,63	3,05	3,31	3,61
1:3	7+7+7	7	7	7	—	2,50	2,50	2,50	—	3,24	7,50	8,40	0,79	2,05	2,98	3,65
	7+7+9	7	7	9	—	2,37	2,37	3,05	—	3,24	7,80	9,00	0,79	2,14	3,14	3,65
	7+7+12	7	7	12	—	2,29	2,29	3,92	—	3,24	8,50	10,20	0,79	2,33	3,31	3,65
	7+7+18	7	7	18	—	2,52	2,52	6,47	—	3,24	11,50	13,20	0,79	3,17	3,64	3,63
	7+7+24	7	7	24	—	2,21	2,21	7,58	—	3,24	12,00	13,80	0,79	3,31	3,80	3,63
	7+9+9	7	9	9	—	2,38	3,06	3,06	—	3,24	8,50	10,20	0,79	2,33	3,31	3,65
	7+9+12	7	9	12	—	2,50	3,21	4,29	—	3,24	10,00	11,40	0,79	2,74	3,47	3,65
	7+9+18	7	9	18	—	2,37	3,04	6,09	—	3,24	11,50	13,20	0,79	3,17	3,64	3,63
	7+9+24	7	9	24	—	2,10	2,70	7,20	—	3,24	12,00	13,80	0,79	3,31	3,83	3,63
	7+12+12	7	12	12	—	2,48	4,26	4,26	—	3,24	11,00	12,00	0,79	3,03	3,47	3,63
	7+12+18	7	12	18	—	2,18	3,73	5,59	—	3,24	11,50	13,20	0,79	3,18	3,64	3,62
	7+12+24	7	12	24	—	1,95	3,35	6,70	—	3,24	12,00	13,80	0,79	3,31	3,77	3,62
	7+18+18	7	18	18	—	1,87	4,81	4,81	—	3,24	11,50	13,20	0,79	3,19	3,64	3,61
	9+9+9	9	9	9	—	3,33	3,33	3,33	—	3,24	10,00	11,40	0,79	2,75	3,47	3,63
	9+9+12	9	9	12	—	3,30	3,30	4,40	—	3,24	11,00	12,00	0,79	3,03	3,47	3,63
	9+9+18	9	9	18	—	2,88	2,88	5,75	—	3,24	11,50	13,20	0,79	3,19	3,64	3,61
	9+9+24	9	9	24	—	2,57	2,57	6,86	—	3,24	12,00	13,80	0,79	3,32	3,77	3,61
	9+12+12	9	12	12	—	3,14	4,18	4,18	—	3,24	11,50	13,20	0,79	3,17	3,64	3,63
	9+12+18	9	12	18	—	2,65	3,54	5,31	—	3,24	11,50	13,20	0,79	3,18	3,64	3,62
	9+12+24	9	12	24	—	2,30	3,07	6,13	—	3,24	11,50	13,20	0,79	3,18	3,64	3,62
	9+18+18	9	18	18	—	2,30	4,60	4,60	—	3,24	11,50	13,20	0,79	3,19	3,64	3,61
	12+12+12	12	12	12	—	3,83	3,83	3,83	—	3,24	11,50	13,20	0,79	3,17	3,64	3,63
	12+12+18	12	12	18	—	3,29	3,29	4,93	—	3,24	11,50	13,20	0,79	3,19	3,64	3,61
1:4	7+7+7+7	7	7	7	7	2,50	2,50	2,50	2,50	4,20	10,00	12,00	0,89	2,59	3,31	3,86
	7+7+7+9	7	7	7	9	2,57	2,57	2,57	3,30	4,20	11,00	12,60	0,89	2,93	3,47	3,75
	7+7+7+12	7	7	7	12	2,50	2,50	2,50	4,29	4,20	11,80	13,20	0,89	3,19	3,64	3,70
	7+7+7+18	7	7	7	18	2,15	2,15	2,15	5,54	4,20	12,00	14,40	0,89	3,29	4,30	3,65
	7+7+9+9	7	7	9	9	2,58	2,58	3,32	3,32	4,20	11,80	13,20	0,89	3,19	3,64	3,70
	7+7+9+12	7	7	9	12	2,40	2,40	3,09	4,11	4,20	12,00	13,80	0,89	3,24	3,97	3,70
	7+7+9+18	7	7	9	18	2,05	2,05	2,63	5,27	4,20	12,00	14,40	0,89	3,31	4,30	3,63
	7+7+12+12	7	7	12	12	2,21	2,21	3,79	3,79	4,20	12,00	14,40	0,89	3,29	4,30	3,65
	7+9+9+9	7	9	9	9	2,47	3,18	3,18	3,18	4,20	12,00	13,80	0,89	3,24	3,80	3,70
	7+9+9+12	7	9	9	12	2,27	2,92	2,92	3,89	4,20	12,00	14,40	0,89	3,30	4,30	3,64
	7+9+9+18	7	9	9	18	1,95	2,51	2,51	5,02	4,20	12,00	14,40	0,89	3,31	4,30	3,63
	7+9+12+12	7	9	12	12	2,10	2,70	3,60	3,60	4,20	12,00	14,40	0,89	3,30	4,30	3,64
	7+12+12+12	7	12	12	12	1,95	3,35	3,35	3,35	4,20	12,00	14,40	0,89	3,31	4,30	3,63
	7+12+12+18	7	12	12	18	1,71	2,94	2,94	4,41	4,20	12,00	14,40	0,89	3,31	4,30	3,63
	9+9+9+9	9	9	9	9	3,00	3,00	3,00	3,00	4,20	12,00	14,40	0,89	3,31	4,30	3,63
	9+9+9+12	9	9	9	12	2,77	2,77	2,77	3,69	4,20	12,00	14,40	0,89	3,31	4,30	3,63
	9+9+9+18	9	9	9	18	2,40	2,40	2,40	4,80	4,20	12,00	14,40	0,89	3,31	4,30	3,63
	9+9+12+12	9	9	12	12	2,57	2,57	3,43	3,43	4,20	12,00	14,40	0,89	3,31	4,30	3,63
	9+12+12+12	9	12	12	12	2,40	3,20	3,20	3,20	4,20	12,00	14,40	0,89	3,31	4,30	3,63

COOLING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)					RATED CAPACITY (kW)(NOM. COOLING)					TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B	UNIT C	UNIT D		UNIT A	UNIT B	UNIT C	UNIT D		MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	—	—	—	2,00	—	—	—	—	1,66	2,00	2,90	0,45	0,62	0,78	3,22
	9	9	—	—	—	—	2,50	—	—	—	—	1,66	2,50	3,20	0,45	0,78	0,97	3,22
	12	12	—	—	—	—	3,50	—	—	—	—	1,66	3,50	3,90	0,45	1,09	1,30	3,22
	18	18	—	—	—	—	5,00	—	—	—	—	1,85	5,00	6,50	0,58	1,56	1,79	3,21
	24	24	—	—	—	—	7,00	—	—	—	—	2,09	7,00	8,20	0,70	2,18	2,29	3,21
1:2	7+7	7	7	—	—	—	2,10	2,10	—	—	—	2,34	4,20	7,38	0,63	1,30	2,16	3,23
	7+9	7	9	—	—	—	2,06	2,64	—	—	—	2,34	4,70	7,63	0,63	1,46	2,31	3,23
	7+12	7	12	—	—	—	2,03	3,47	—	—	—	2,34	5,50	8,00	0,63	1,70	2,50	3,23
	7+18	7	18	—	—	—	1,96	5,04	—	—	—	2,34	7,00	9,84	0,63	2,17	2,65	3,23
	7+24	7	24	—	—	—	2,05	7,05	—	—	—	2,34	9,10	11,69	0,63	2,83	2,98	3,21
	9+9	9	9	—	—	—	2,65	2,65	—	—	—	2,34	5,30	8,00	0,63	1,64	2,50	3,23
	9+12	9	12	—	—	—	2,57	3,43	—	—	—	2,34	6,00	8,61	0,63	1,86	2,53	3,23
	9+18	9	18	—	—	—	2,50	5,00	—	—	—	2,34	7,50	11,07	0,63	2,34	2,80	3,21
	9+24	9	24	—	—	—	2,65	7,05	—	—	—	2,34	9,70	12,30	0,63	3,02	3,17	3,21
	12+12	12	12	—	—	—	3,50	3,50	—	—	—	2,34	7,00	9,23	0,63	2,17	2,65	3,23
	12+18	12	18	—	—	—	3,40	5,10	—	—	—	2,34	8,50	11,69	0,63	2,65	3,06	3,21
	12+24	12	24	—	—	—	3,33	6,67	—	—	—	2,34	10,00	12,30	0,63	3,12	3,35	3,21
	18+18	18	18	—	—	—	5,25	5,25	—	—	—	2,34	10,50	12,30	0,63	3,27	3,35	3,21
1:3	7+7+7	7	7	7	—	—	2,00	2,00	2,00	—	—	2,89	6,00	7,38	0,78	1,85	2,98	3,25
	7+7+9	7	7	9	—	—	1,98	1,98	2,54	—	—	2,89	6,50	8,61	0,78	2,00	3,17	3,25
	7+7+12	7	7	12	—	—	2,02	2,02	3,46	—	—	2,89	7,50	9,23	0,78	2,31	3,35	3,25
	7+7+18	7	7	18	—	—	1,97	1,97	5,06	—	—	2,89	9,00	11,07	0,78	2,78	3,54	3,24
	7+7+24	7	7	24	—	—	2,03	2,03	6,95	—	—	2,89	11,00	12,92	0,78	3,42	3,73	3,22
	7+9+9	7	9	9	—	—	1,96	2,52	2,52	—	—	2,89	7,00	9,23	0,78	2,15	3,28	3,25
	7+9+12	7	9	12	—	—	2,00	2,57	3,43	—	—	2,89	8,00	10,46	0,78	2,46	3,43	3,25
	7+9+18	7	9	18	—	—	1,96	2,51	5,03	—	—	2,89	9,50	11,07	0,78	2,93	3,65	3,24
	7+9+24	7	9	24	—	—	2,01	2,59	6,90	—	—	2,89	11,50	12,92	0,78	3,57	3,88	3,22
	7+12+12	7	12	12	—	—	2,03	3,48	3,48	—	—	2,89	9,00	11,07	0,78	2,78	3,54	3,24
	7+12+18	7	12	18	—	—	1,99	3,41	5,11	—	—	2,89	10,50	12,30	0,78	3,26	3,73	3,22
	7+12+24	7	12	24	—	—	1,87	3,21	6,42	—	—	2,89	11,50	12,92	0,78	3,57	3,88	3,22
	7+18+18	7	18	18	—	—	1,87	4,81	4,81	—	—	2,89	11,50	12,92	0,78	3,57	3,88	3,22
	9+9+9	9	9	9	—	—	2,67	2,67	2,67	—	—	2,89	8,00	10,46	0,78	2,46	3,73	3,25
	9+9+12	9	9	12	—	—	2,70	2,70	3,60	—	—	2,89	9,00	12,92	0,78	2,78	3,54	3,24
	9+9+18	9	9	18	—	—	2,63	2,63	5,25	—	—	2,89	10,50	12,30	0,78	3,26	3,73	3,22
	9+9+24	9	9	24	—	—	2,46	2,46	6,57	—	—	2,89	11,50	12,92	0,78	3,57	3,88	3,22
	9+12+12	9	12	12	—	—	2,45	3,27	3,27	—	—	2,89	9,00	11,07	0,78	2,78	3,54	3,24
	9+12+18	9	12	18	—	—	2,54	3,38	5,08	—	—	2,89	11,00	11,69	0,78	3,42	3,73	3,22
	9+12+24	9	12	24	—	—	2,30	3,07	6,13	—	—	2,89	11,50	12,92	0,78	3,57	3,88	3,22
	9+18+18	9	18	18	—	—	2,40	4,80	4,80	—	—	2,89	12,00	12,92	0,78	3,74	3,88	3,21
	12+12+12	12	12	12	—	—	3,17	3,17	3,17	—	—	2,89	9,50	11,07	0,78	2,93	3,65	3,24
	12+12+18	12	12	18	—	—	3,29	3,29	4,93	—	—	2,89	11,50	12,92	0,78	3,57	3,88	3,22
	12+12+24	12	12	24	—	—	3,00	3,00	6,00	—	—	2,89	12,00	12,92	0,78	3,74	3,88	3,21
	12+18+18	12	18	18	—	—	3,00	4,50	4,50	—	—	2,89	12,00	12,92	0,78	3,74	3,88	3,21
1:4	7+7+7+7	7	7	7	7	—	2,00	2,00	2,00	2,00	—	3,69	8,00	10,50	0,89	2,45	3,35	3,26
	7+7+7+9	7	7	7	9	—	1,98	1,98	1,98	2,55	—	3,69	8,50	11,07	0,89	2,61	3,54	3,26
	7+7+7+12	7	7	7	12	—	2,02	2,02	2,02	3,45	—	3,69	9,50	11,69	0,89	2,92	3,65	3,25
	7+7+7+18	7	7	7	18	—	2,06	2,06	2,06	5,31	—	3,69	11,50	12,30	0,89	3,57	4,10	3,22
	7+7+7+24	7	7	7	24	—	1,87	1,87	1,87	6,40	—	3,69	12,00	13,53	0,89	3,74	4,29	3,21
	7+7+9+9	7	7	9	9	—	2,08	2,08	2,67	2,67	—	3,69	9,50	11,69	0,89	2,92	3,65	3,25
	7+7+9+12	7	7	9	12	—	2,00	2,00	2,57	3,43	—	3,69	10,00	12,30	0,89	3,08	4,10	3,25
	7+7+9+18	7	7	9	18	—	1,96	1,96	2,52	5,05	—	3,69	11,50	12,30	0,89	3,57	4,10	3,22
	7+7+9+24	7	7	9	24		1,79	1,79	2,30	6,13	—	3,69	12,00	13,53	0,89	3,74	4,29	3,21
	7+7+12+12	7	7	12	12	—	1,93	1,93	3,32	3,32	—	3,69	10,50	12,92	0,89	3,25	4,10	3,23
	7+7+12+18	7	7	12	18	—	1,83	1,83	3,14	4,70	—	3,69	11,50	13,53	0,89	3,57	4,10	3,22
	7+7+12+24	7	7	12	24	—	1,72	1,72	2,95	5,90	—	3,69	12,30	13,53	0,89	3,83	4,29	3,21
	7+7+18+18	7	7	18	18	—	1,72	1,72	4,43	4,43	—	3,69	12,30	13,53	0,89	3,83	4,29	3,21
	7+9+9+9	7	9	9	9	—	2,06	2,65	2,65	2,65	—	3,69	10,00	12,30	0,89	3,08	4,10	3,25
	7+9+9+12	7	9	9	12	—	1,99	2,55	2,55	3,41	—	3,69	10,50	12,92	0,89	3,25	4,10	3,23
	7+9+9+18	7	9	9	18	—	1,87	2,41	2,41	4,81	—	3,69	11,50	13,53	0,89	3,57	4,10	3,22
	7+9+9+24	7	9	9	24	—	1,76	2,26	2,26	6,02	—	3,69	12,30	13,53	0,89	3,83	4,29	3,21
	7+9+12+12	7	9	12	12	—	2,01	2,59	3,45	3,45	—	3,69	11,50	13,53	0,89	3,57	4,10	3,22
	7+9+12+18	7	9	12	18	—	1,83	2,35	3,13	4,70	—	3,69	12,00	13,53	0,89	3,74	4,29	3,21
	7+9+12+24	7	9	12	24	—	1,66	2,13	2,84	5,68	—	3,69	12,30	13,53	0,89	3,83	4,29	3,21
	7+9+18+18	7	9	18	18	—	1,66	2,13	4,26	4,26	—	3,69	12,30	13,53	0,89	3,83	4,29	3,21
	7+12+12+12	7	12	12	12	—	1,87	3,21	3,21	3,21	—	3,69	11,50	13,53	0,89	3,57	4,10	3,22
	7+12+12+18	7	12	12	18	—	1,71	2,94	2,94	4,41	—	3,69	12,00	13,53	0,89	3,74	4,29	3,21
	9+9+9+9	9	9	9	9	—	2,63	2,63	2,63	2,63	—	3,69	10,50	12,92	0,89	3,25	4,10	3,23
	9+9+9+12	9	9	9	12	—	2,65	2,65	2,65	3,54	—	3,69	11,50	13,53	0,89	3,57	4,10	3,22
	9+9+9+18	9	9	9	18	—	2,40	2,40	2,40	4,80	—	3,69	12,00	13,53	0,89	3,74	4,29	3,21
	9+9+9+24	9	9	9	24	—	2,17	2,17	2,17	5,79	—	3,69	12,30	13,53	0,89	3,83	4,29	3,21
	9+9+12+12	9	9	12	12	—	2,46	2,46	3,29	3,29	—	3,69	11,50	13,53	0,89	3,57	4,10	3,22
	9+9+12+18	9	9	12	18	—	2,25	2,25	3,00	4,50	—	3,69	12,00	13,53	0,89	3,74	4,29	3,21
	9+9+12+24	9	9	12	24	—	2,05	2,05	2,73	5,47	—	3,69	12,30	13,53	0,89	3,83	4,29	3,21
	9+12+12+12	9	12	12	12	—	2,30	3,07	3,07	3,07	—	3,69	11,50	13,53	0,89	3,57	4,10	3,22
	9+12+12+18	9	12	12	18	—	2,17	2,89	2,89	4,34	—	3,69	12,30	13,53	0,89	3,83	4,29	3,21
	12+12+12+12	12	12	12	12	—	2,88	2,88	2,88	2,88	—	3,69	11,50	13,53	0,89	3,57	4,10	3,22
	12+12+12+18	12	12	12	18	—	2,73	2,73	2,73	4,10	—	3,69	12,30	13,53	0,89	3,83	4,29	3,21
1:5	7+7+7+7+7	7	7	7	7	7	2,10	2,10	2,10	2,10	2,10	4,18	10,50	14,00	1,01	3,09	4,96	3,40
	7+7+7+7+9	7	7	7	7	9	2,08	2,08	2,08	2,08	2,68	4,18	11,00	14,00	1,01	3,24	4,96	3,40
	7+7+7+7+12	7	7	7	7	12	2,01	2,01	2,01	2,01	3,45	4,18	11,50	14,00	1,01	3,42	4,96	3,37
	7+7+7+7+18	7	7	7	7	18	1,87	1,87	1,87	1,87	4,81	4,18	12,30	14,00	1,01	3,73	4,96	3,30
	7+7+7+9+9	7	7	7	9	9	2,06	2,06	2,06	2,65	2,65	4,18	11,50	14,00	1,01	3,42	4,96	3,37
	7+7+7+9+12	7	7	7	9	12	2,00	2,00	2,00	2,57	3,43	4,18	12,00	14,00	1,01	3,57	4,96	3,37
	7+7+7+9+18	7	7	7	9	18	1,79	1,79	1,79	2,31	4,61	4,18	12,30	14,00	1,01	3,73	4,96	3,30
	7+7+9+9+9	7	7	9	9	9	2,05	2,05	2,63	2,63	2,63	4,18	12,00	14,00	1,01	3,57	4,96	3,37
	7+7+9+9+12	7	7	9	9	12	1,96	1,96	2,52	2,52	3,35	4,18	12,30	14,00	1,01	3,69	4,96	3,33
	7+7+9+9+18	7	7	9	9	18	1,72	1,72	2,21	2,21	4,43	4,18	12,30	14,00	1,01	3,75	4,96	3,28
	7+7+12+12+12	7	7	12	12	12	1,72	1,72	2,95	2,95	2,95	4,18	12,30	14,00	1,01	3,73	4,96	3,30
	7+7+12+12+18	7	7	12	12	18	1,54	1,54	2,64	2,64	3,95	4,18	12,30	14,00	1,01	3,76	4,96	3,27
	7+9+9+9+9	7	9	9	9	9	2,00	2,57	2,57	2,57	2,57	4,18	12,30	14,00	1,01	3,69	4,96	3,33
	7+9+9+9+12	7	9	9	9	12	1,87	2,41	2,41	2,41	3,21	4,18	12,30	14,00	1,01	3,73	4,96	3,30
	7+9+9+9+18	7	9	9	9	18	1,66	2,13	2,13	2,13	4,26	4,18	12,30	14,00	1,01	3,76	4,96	3,27
	7+9+9+12+12	7	9	9	12	12	1,76	2,26	2,26	3,01	3,01	4,18	12,30	14,00	1,01	3,73	4,96	3,30
	7+9+12+12+12	7	9	12	12	12	1,66	2,13	2,84	2,84	2,84	4,18	12,30	14,00	1,01	3,75	4,96	3,28
	9+9+9+9+9	9	9	9	9	9	2,46	2,46	2,46	2,46	2,46	4,18	12,30	14,00	1,01	3,73	4,96	3,30
	9+9+9+9+12	9	9	9	9	12	2,31	2,31	2,31	2,31	3,08	4,18	12,30	14,00	1,01	3,73	4,96	3,30
	9+9+9+9+18	9	9	9	9	18	2,05	2,05	2,05	2,05	4,10	4,18	12,30	14,00	1,01	3,76	4,96	3,27
	9+9+9+12+12	9	9	9	12	12	2,17	2,17	2,17	2,89	2,89	4,18	12,30	14,00	1,01	3,75	4,96	3,28
	9+9+12+12+12	9	9	12	12	12	2,05	2,05	2,73	2,73	2,73	4,18	12,30	14,00	1,01	3,75	4,96	3,28

INDOOR COMBINATION AND VARIABLE CAPACITY FOR 42K HEAT PUMP (SYSTEM 5)

HEATING

COMB.	INDOOR UNITS	COMBINATIONS (X1000 BTU/H)					RATED CAPACITY (kW)(NOM. COOLING)					TOTAL COOLING CAPACITY (kW)			TOTAL POWER INPUT (kW)			EER (W/W)
		UNIT A	UNIT B	UNIT C	UNIT D		UNIT A	UNIT B	UNIT C	UNIT D		MIN.	RATED	MAX.	MIN.	RATED	MAX.	
1:1	7	7	—	—	—	—	2,50	—	—	—	—	1,66	2,50	2,90	0,45	0,69	0,87	3,61
	9	9	—	—	—	—	3,00	—	—	—	—	1,66	3,00	3,20	0,45	0,83	1,04	3,61
	12	12	—	—	—	—	3,80	—	—	—	—	1,66	3,80	3,90	0,45	1,05	1,26	3,61
	18	18	—	—	—	—	5,60	—	—	—	—	1,85	5,60	7,00	0,58	1,55	1,78	3,61
	24	24	—	—	—	—	7,60	—	—	—	—	2,09	7,60	8,50	0,70	2,10	2,20	3,62
1:2	7+7	7	7	—	—	—	2,50	2,50	—	—	—	2,34	5,00	7,38	0,57	1,38	1,95	3,63
	7+9	7	9	—	—	—	2,45	3,15	—	—	—	2,34	5,60	7,63	0,57	1,54	2,09	3,63
	7+12	7	12	—	—	—	2,21	3,79	—	—	—	2,34	6,00	8,00	0,57	1,65	2,26	3,63
	7+18	7	18	—	—	—	2,24	5,76	—	—	—	2,34	8,00	9,84	0,57	2,20	2,39	3,63
	7+24	7	24	—	—	—	2,21	7,59	—	—	—	2,34	9,80	11,69	0,57	2,71	2,70	3,62
	9+9	9	9	—	—	—	3,00	3,00	—	—	—	2,34	6,00	8,00	0,57	1,65	2,26	3,63
	9+12	9	12	—	—	—	2,91	3,89	—	—	—	2,34	6,80	8,61	0,57	1,87	2,29	3,63
	9+18	9	18	—	—	—	2,93	5,87	—	—	—	2,34	8,80	11,07	0,57	2,42	2,53	3,63
	9+24	9	24	—	—	—	2,78	7,42	—	—	—	2,34	10,20	12,30	0,57	2,82	2,86	3,62
	12+12	12	12	—	—	—	3,75	3,75	—	—	—	2,34	7,50	9,23	0,57	2,07	2,39	3,63
	12+18	12	18	—	—	—	3,76	5,64	—	—	—	2,34	9,40	11,69	0,57	2,59	2,76	3,63
	12+24	12	24	—	—	—	3,50	7,00	—	—	—	2,34	10,50	12,30	0,57	2,90	3,03	3,62
	18+18	18	18	—	—	—	5,50	5,50	—	—	—	2,34	11,00	12,30	0,57	3,04	3,03	3,62
1:3	7+7+7	7	7	7	—	—	2,50	2,50	2,50	—	—	2,89	7,50	8,61	0,71	2,05	2,70	3,65
	7+7+9	7	7	9	—	—	2,37	2,37	3,05	—	—	2,89	7,80	9,23	0,71	2,14	2,86	3,65
	7+7+12	7	7	12	—	—	2,29	2,29	3,92	—	—	2,89	8,50	9,84	0,71	2,33	3,03	3,65
	7+7+18	7	7	18	—	—	2,52	2,52	6,47	—	—	2,89	11,50	12,30	0,71	3,16	3,20	3,64
	7+7+24	7	7	24	—	—	2,21	2,21	7,58	—	—	2,89	12,00	12,92	0,71	3,31	3,37	3,62
	7+9+9	7	9	9	—	—	2,38	3,06	3,06	—	—	2,89	8,50	9,84	0,71	2,33	2,97	3,65
	7+9+12	7	9	12	—	—	2,50	3,21	4,29	—	—	2,89	10,00	12,30	0,71	2,74	3,10	3,65
	7+9+18	7	9	18	—	—	2,37	3,04	6,09	—	—	2,89	11,50	12,30	0,71	3,16	3,30	3,64
	7+9+24	7	9	24	—	—	2,10	2,70	7,20	—	—	2,89	12,00	12,92	0,71	3,31	3,50	3,62
	7+12+12	7	12	12	—	—	2,48	4,26	4,26	—	—	2,89	11,00	12,30	0,71	3,01	3,20	3,65
	7+12+18	7	12	18	—	—	2,18	3,73	5,59	—	—	2,89	11,50	12,30	0,71	3,17	3,37	3,63
	7+12+24	7	12	24	—	—	1,95	3,35	6,70	—	—	2,89	12,00	12,92	0,71	3,32	3,50	3,61
	7+18+18	7	18	18	—	—	1,95	5,02	5,02	—	—	2,89	12,00	12,92	0,71	3,32	3,50	3,61
	9+9+9	9	9	9	—	—	3,33	3,33	3,33	—	—	2,89	10,00	12,30	0,71	2,74	3,37	3,65
	9+9+12	9	9	12	—	—	3,30	3,30	4,40	—	—	2,89	11,00	12,30	0,71	3,01	3,20	3,65
	9+9+18	9	9	18	—	—	2,88	2,88	5,75	—	—	2,89	11,50	12,30	0,71	3,17	3,37	3,63
	9+9+24	9	9	24	—	—	2,57	2,57	6,86	—	—	2,89	12,00	12,92	0,71	3,32	3,50	3,61
	9+12+12	9	12	12	—	—	3,14	4,18	4,18	—	—	2,89	11,50	12,30	0,71	3,16	3,20	3,64
	9+12+18	9	12	18	—	—	2,77	3,69	5,54	—	—	2,89	12,00	12,92	0,71	3,31	3,37	3,62
	9+12+24	9	12	24	—	—	2,40	3,20	6,40	—	—	2,89	12,00	12,92	0,71	3,32	3,50	3,61
	9+18+18	9	18	18	—	—	2,40	4,80	4,80	—	—	2,89	12,00	12,92	0,71	3,32	3,50	3,61
	12+12+12	12	12	12	—	—	3,83	3,83	3,83	—	—	2,89	11,50	12,30	0,71	3,16	3,30	3,64
	12+12+18	12	12	18	—	—	3,43	3,43	5,14	—	—	2,89	12,00	12,92	0,71	3,31	3,50	3,62
	12+12+24	12	12	24	—	—	3,00	3,00	6,00	—	—	2,89	12,00	12,92	0,71	3,32	3,50	3,61
	12+18+18	12	18	18	—	—	3,00	4,50	4,50	—	—	2,89	12,00	12,92	0,71	3,32	3,50	3,61
1:4	7+7+7+7	7	7	7	7	—	2,50	2,50	2,50	2,50	—	3,69	10,00	12,67	0,81	2,74	3,03	3,65
	7+7+7+9	7	7	7	9	—	2,57	2,57	2,57	3,30	—	3,69	11,00	12,92	0,81	3,01	3,20	3,65
	7+7+7+12	7	7	7	12	—	2,50	2,50	2,50	4,29	—	3,69	11,80	13,53	0,81	3,23	3,30	3,65
	7+7+7+18	7	7	7	18	—	2,15	2,15	2,15	5,54	—	3,69	12,00	13,53	0,81	3,31	3,71	3,63
	7+7+7+24	7	7	7	24	—	1,91	1,91	1,91	6,56	—	3,69	12,30	13,53	0,81	3,40	3,88	3,62
	7+7+9+9	7	7	9	9	—	2,63	2,63	3,38	3,38	—	3,69	12,00	13,53	0,81	3,29	3,30	3,65
	7+7+9+12	7	7	9	12	—	2,40	2,40	3,09	4,11	—	3,69	12,00	13,53	0,81	3,29	3,71	3,65
	7+7+9+18	7	7	9	18	—	2,05	2,05	2,63	5,27	—	3,69	12,00	13,53	0,81	3,31	3,71	3,63
	7+7+9+24	7	7	9	24		1,83	1,83	2,36	6,28	—	3,69	12,30	13,53	0,81	3,41	3,88	3,61
	7+7+12+12	7	7	12	12	—	2,21	2,21	3,79	3,79	—	3,69	12,00	13,53	0,81	3,30	3,71	3,64
	7+7+12+18	7	7	12	18	—	1,91	1,91	3,27	4,91	—	3,69	12,00	13,53	0,81	3,31	3,71	3,63
	7+7+12+24	7	7	12	24	—	1,72	1,72	2,95	5,90	—	3,69	12,30	13,53	0,81	3,41	3,88	3,61
	7+7+18+18	7	7	18	18	—	1,68	1,68	4,32	4,32	—	3,69	12,00	13,53	0,81	3,32	3,88	3,61
	7+9+9+9	7	9	9	9	—	2,47	3,18	3,18	3,18	—	3,69	12,00	13,53	0,81	3,29	3,71	3,65
	7+9+9+12	7	9	9	12	—	2,27	2,92	2,92	3,89	—	3,69	12,00	13,53	0,81	3,30	3,71	3,64
	7+9+9+18	7	9	9	18	—	1,95	2,51	2,51	5,02	—	3,69	12,00	13,53	0,81	3,31	3,71	3,63
	7+9+9+24	7	9	9	24	—	1,76	2,26	2,26	6,02	—	3,69	12,30	13,53	0,81	3,41	3,88	3,61
	7+9+12+12	7	9	12	12	—	2,10	2,70	3,60	3,60	—	3,69	12,00	13,53	0,81	3,31	3,71	3,63
	7+9+12+18	7	9	12	18	—	1,83	2,35	3,13	4,70	—	3,69	12,00	13,53	0,81	3,32	3,88	3,61
	7+9+12+24	7	9	12	24	—	1,66	2,13	2,84	5,68	—	3,69	12,30	13,53	0,81	3,41	3,88	3,61
	7+9+18+18	7	9	18	18	—	1,62	2,08	4,15	4,15	—	3,69	12,00	13,53	0,81	3,31	3,88	3,62
	7+12+12+12	7	12	12	12	—	1,95	3,35	3,35	3,35	—	3,69	12,00	13,53	0,81	3,31	3,71	3,63
	7+12+12+18	7	12	12	18	—	1,71	2,94	2,94	4,41	—	3,69	12,00	13,53	0,81	3,32	3,88	3,61
	9+9+9+9	9	9	9	9	—	3,00	3,00	3,00	3,00	—	3,69	12,00	13,53	0,81	3,30	3,71	3,64
	9+9+9+12	9	9	9	12	—	2,77	2,77	2,77	3,69	—	3,69	12,00	13,53	0,81	3,31	3,71	3,63
	9+9+9+18	9	9	9	18	—	2,40	2,40	2,40	4,80	—	3,69	12,00	13,53	0,81	3,32	3,88	3,61
	9+9+9+24	9	9	9	24	—	2,17	2,17	2,17	5,79	—	3,69	12,30	13,53	0,81	3,41	3,88	3,61
	9+9+12+12	9	9	12	12	—	2,57	2,57	3,43	3,43	—	3,69	12,00	13,53	0,81	3,31	3,71	3,63
	9+9+12+18	9	9	12	18	—	2,25	2,25	3,00	4,50	—	3,69	12,00	13,53	0,81	3,32	3,88	3,61
	9+9+12+24	9	9	12	24	—	2,05	2,05	2,73	5,47	—	3,69	12,30	13,53	0,81	3,40	3,88	3,62
	9+12+12+12	9	12	12	12	—	2,40	3,20	3,20	3,20	—	3,69	12,00	13,53	0,81	3,31	3,71	3,63
	9+12+12+18	9	12	12	18	—	2,12	2,82	2,82	4,24	—	3,69	12,00	13,53	0,81	3,32	3,88	3,61
	12+12+12+12	12	12	12	12	—	3,00	3,00	3,00	3,00	—	3,69	12,00	13,53	0,81	3,31	3,71	3,63
	12+12+12+18	12	12	12	18	—	2,67	2,67	2,67	4,00	—	3,69	12,00	13,53	0,81	3,32	3,88	3,61
1:5	7+7+7+7+7	7	7	7	7	7	2,46	2,46	2,46	2,46	2,46	4,18	12,30	14,94	0,91	3,40	4,48	3,62
	7+7+7+7+9	7	7	7	7	9	2,33	2,33	2,33	2,33	2,99	4,18	12,30	14,94	0,91	3,40	4,48	3,62
	7+7+7+7+12	7	7	7	7	12	2,15	2,15	2,15	2,15	3,69	4,18	12,30	14,94	0,91	3,40	4,48	3,62
	7+7+7+7+18	7	7	7	7	18	1,87	1,87	1,87	1,87	4,81	4,18	12,30	14,94	0,91	3,37	4,48	3,65
	7+7+7+9+9	7	7	7	9	9	2,21	2,21	2,21	2,84	2,84	4,18	12,30	14,94	0,91	3,40	4,48	3,62
	7+7+7+9+12	7	7	7	9	12	2,05	2,05	2,05	2,64	3,51	4,18	12,30	14,94	0,91	3,40	4,48	3,62
	7+7+7+9+18	7	7	7	9	18	1,79	1,79	1,79	2,31	4,61	4,18	12,30	14,94	0,91	3,32	4,48	3,71
	7+7+9+9+9	7	7	9	9	9	2,10	2,10	2,70	2,70	2,70	4,18	12,30	14,94	0,91	3,40	4,48	3,62
	7+7+9+9+12	7	7	9	9	12	1,96	1,96	2,52	2,52	3,35	4,18	12,30	14,94	0,91	3,40	4,48	3,62
	7+7+9+9+18	7	7	9	9	18	1,72	1,72	2,21	2,21	4,43	4,18	12,30	14,94	0,91	3,32	4,48	3,71
	7+7+12+12+12	7	7	12	12	12	1,72	1,72	2,95	2,95	2,95	4,18	12,30	14,94	0,91	3,37	4,48	3,65
	7+7+12+12+18	7	7	12	12	18	1,54	1,54	2,64	2,64	3,95	4,18	12,30	14,94	0,91	3,28	4,48	3,75
	7+9+9+9+9	7	9	9	9	9	2,00	2,57	2,57	2,57	2,57	4,18	12,30	14,94	0,91	3,40	4,48	3,62
	7+9+9+9+12	7	9	9	9	12	1,87	2,41	2,41	2,41	3,21	4,18	12,30	14,94	0,91	3,37	4,48	3,65
	7+9+9+9+18	7	9	9	9	18	1,66	2,13	2,13	2,13	4,26	4,18	12,30	14,94	0,91	3,28	4,48	3,75
	7+9+9+12+12	7	9	9	12	12	1,76	2,26	2,26	3,01	3,01	4,18	12,30	14,94	0,91	3,37	4,48	3,65
	7+9+12+12+12	7	9	12	12	12	1,66	2,13	2,84	2,84	2,84	4,18	12,30	14,94	0,91	3,32	4,48	3,71
	9+9+9+9+9	9	9	9	9	9	2,46	2,46	2,46	2,46	2,46	4,18	12,30	14,94	0,91	3,37	4,48	3,65
	9+9+9+9+12	9	9	9	9	12	2,31	2,31	2,31	2,31	3,08	4,18	12,30	14,94	0,91	3,37	4,48	3,65
	9+9+9+9+18	9	9	9	9	18	2,05	2,05	2,05	2,05	4,10	4,18	12,30	14,94	0,91	3,28	4,48	3,75
	9+9+9+12+12	9	9	9	12	12	2,17	2,17	2,17	2,89	2,89	4,18	12,30	14,94	0,91	3,32	4,48	3,71
	9+9+12+12+12	9	9	12	12	12	2,05	2,05	2,73	2,73	2,73	4,18	12,30	14,94	0,91	3,32	4,48	3,71